



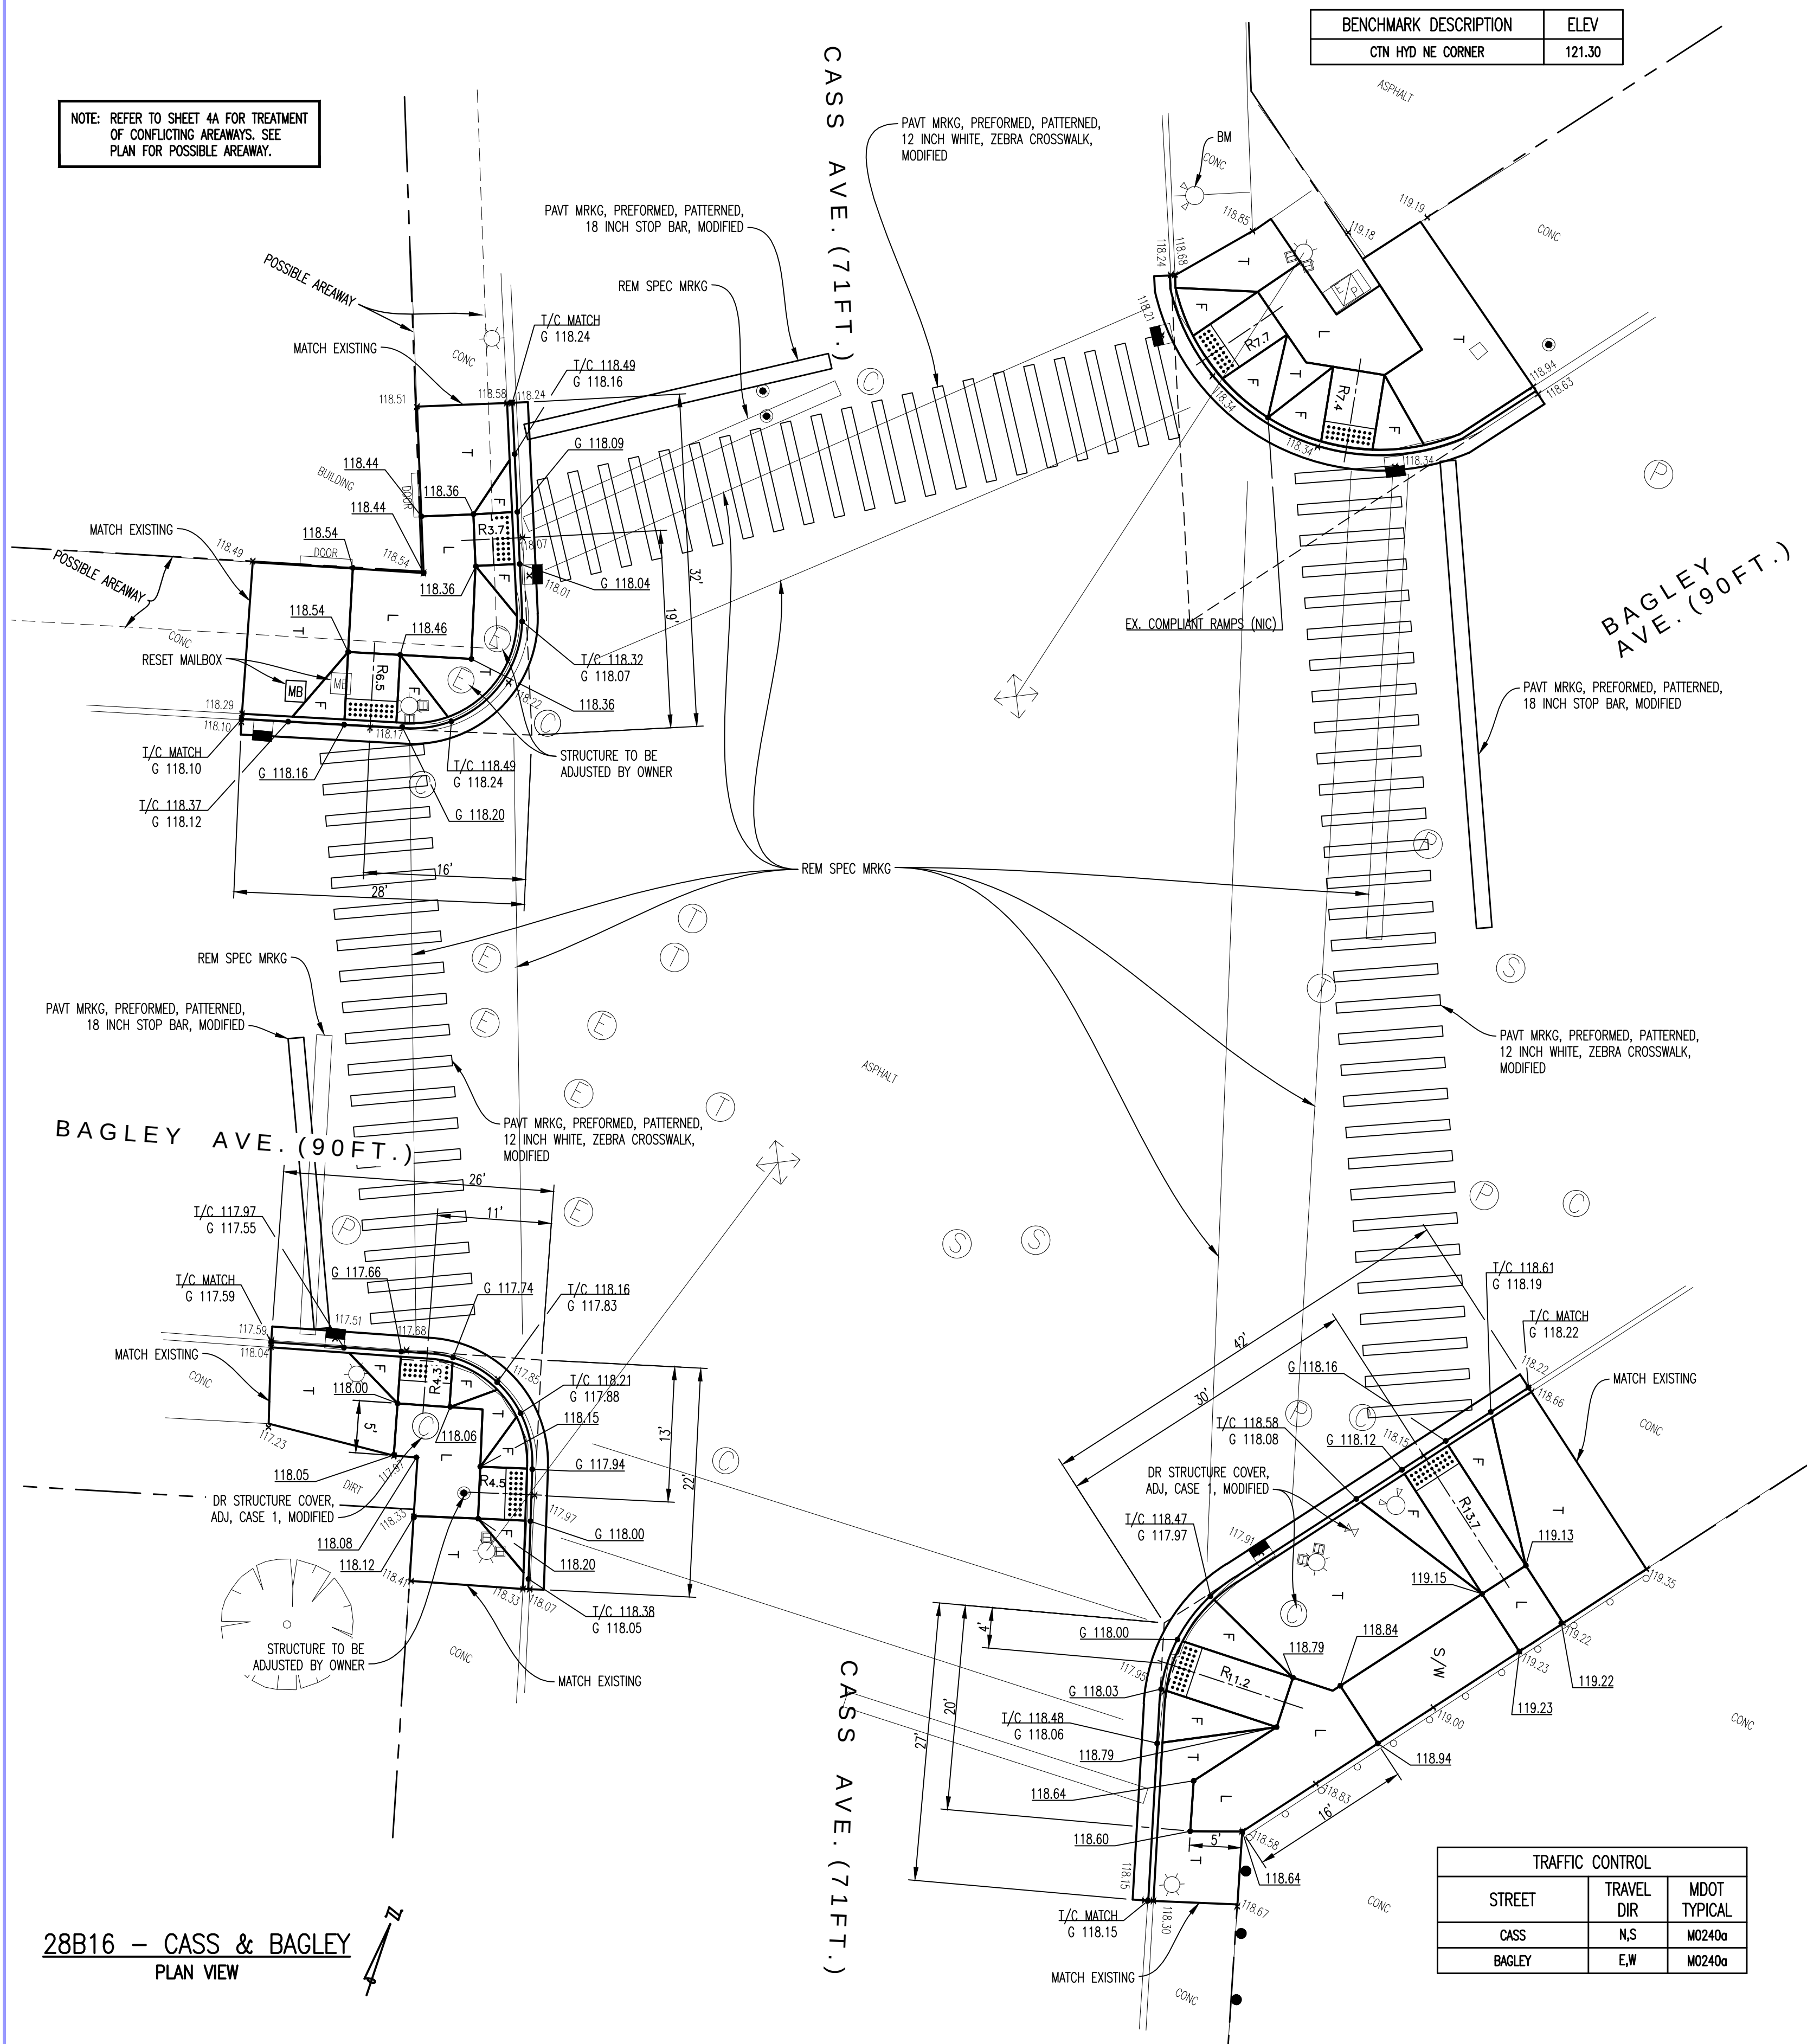

ESTIMATED QUANTITIES

BAGLEY & CASS		
ITEM DESCRIPTION	UNIT	QUANTITY
Sidewalk, Rem	Syd	206
Curb, Rem, Modified	Ft	164
Pavt, Rem, Modified	Syd	28
HMA Surface, Rem, Modified	Syd	38
Lane Tie, Epoxy Anchored	Sft	58
Dr Structure Cover, Adj, Case 1, Modified	Ea	2
Hand Patching	Ton	6.20
Reset Mail Box	Ea	1
Curb and Gutter, Conc, Det C3, Modified	Ft	164
Sidewalk, Conc, 4 inch, Modified	Sft	1072
Sidewalk Ramp, ADA, 6 inch, Modified	Sft	781
24 inch x 60 inch Detectable Warning Surface Tiles, Modified	Ea	6
Rem Spec Mrkg	Sft	875
Pavt Mrkg, Preformed, Patterned, 18 inch Stop Bar, Modified	Ft	103
Pavt Mrkg, Preformed, Patterned, 12 inch White, Zebra Crosswalk, Modified	Ft	720

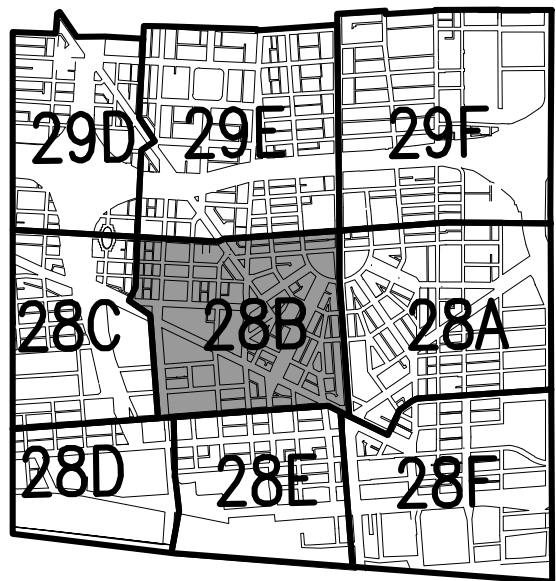


KEY PLAN

ISSUE	BY	CHK'D	APP'D	DATE



CITY OF DETROIT
DEPARTMENT OF PUBLIC WORKS
CITY ENGINEERING DIVISION

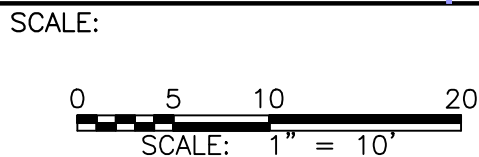

DESIGNED BY	CC, KP, MA, KJ	Prime Consultant
CHECKED BY	RAK	
APPROVED BY	GMP	



TUCKER, YOUNG
JACKSON, TULL INC.
CONSULTING ENGINEERS PLANNERS
545 E. LARNED SUITE 300 DETROIT, MICHIGAN 48226
(313) 963-0612 FAX (313) 963-2156 WWW.TYJ.COM

Sub Consultants:	H. R. Gray
	Per Construction Services



PROJECT	ADA SIDEWALK RAMP CONSTRUCTION
SHEET TITLE	INTERSECTION DETAILS

CONTRACT NUMBER	DATE
105541A	10-1-09
	SHEET NO.
	16