



BENCH MARKS

BM #10 ELEV 120.74
ARROW ON HYDRANT LOCATED AT THE
NORTHWEST CORNER OF CONGRESS ST
AND WASHINGTON BLVD



SCALE: 1" = 10'-0"

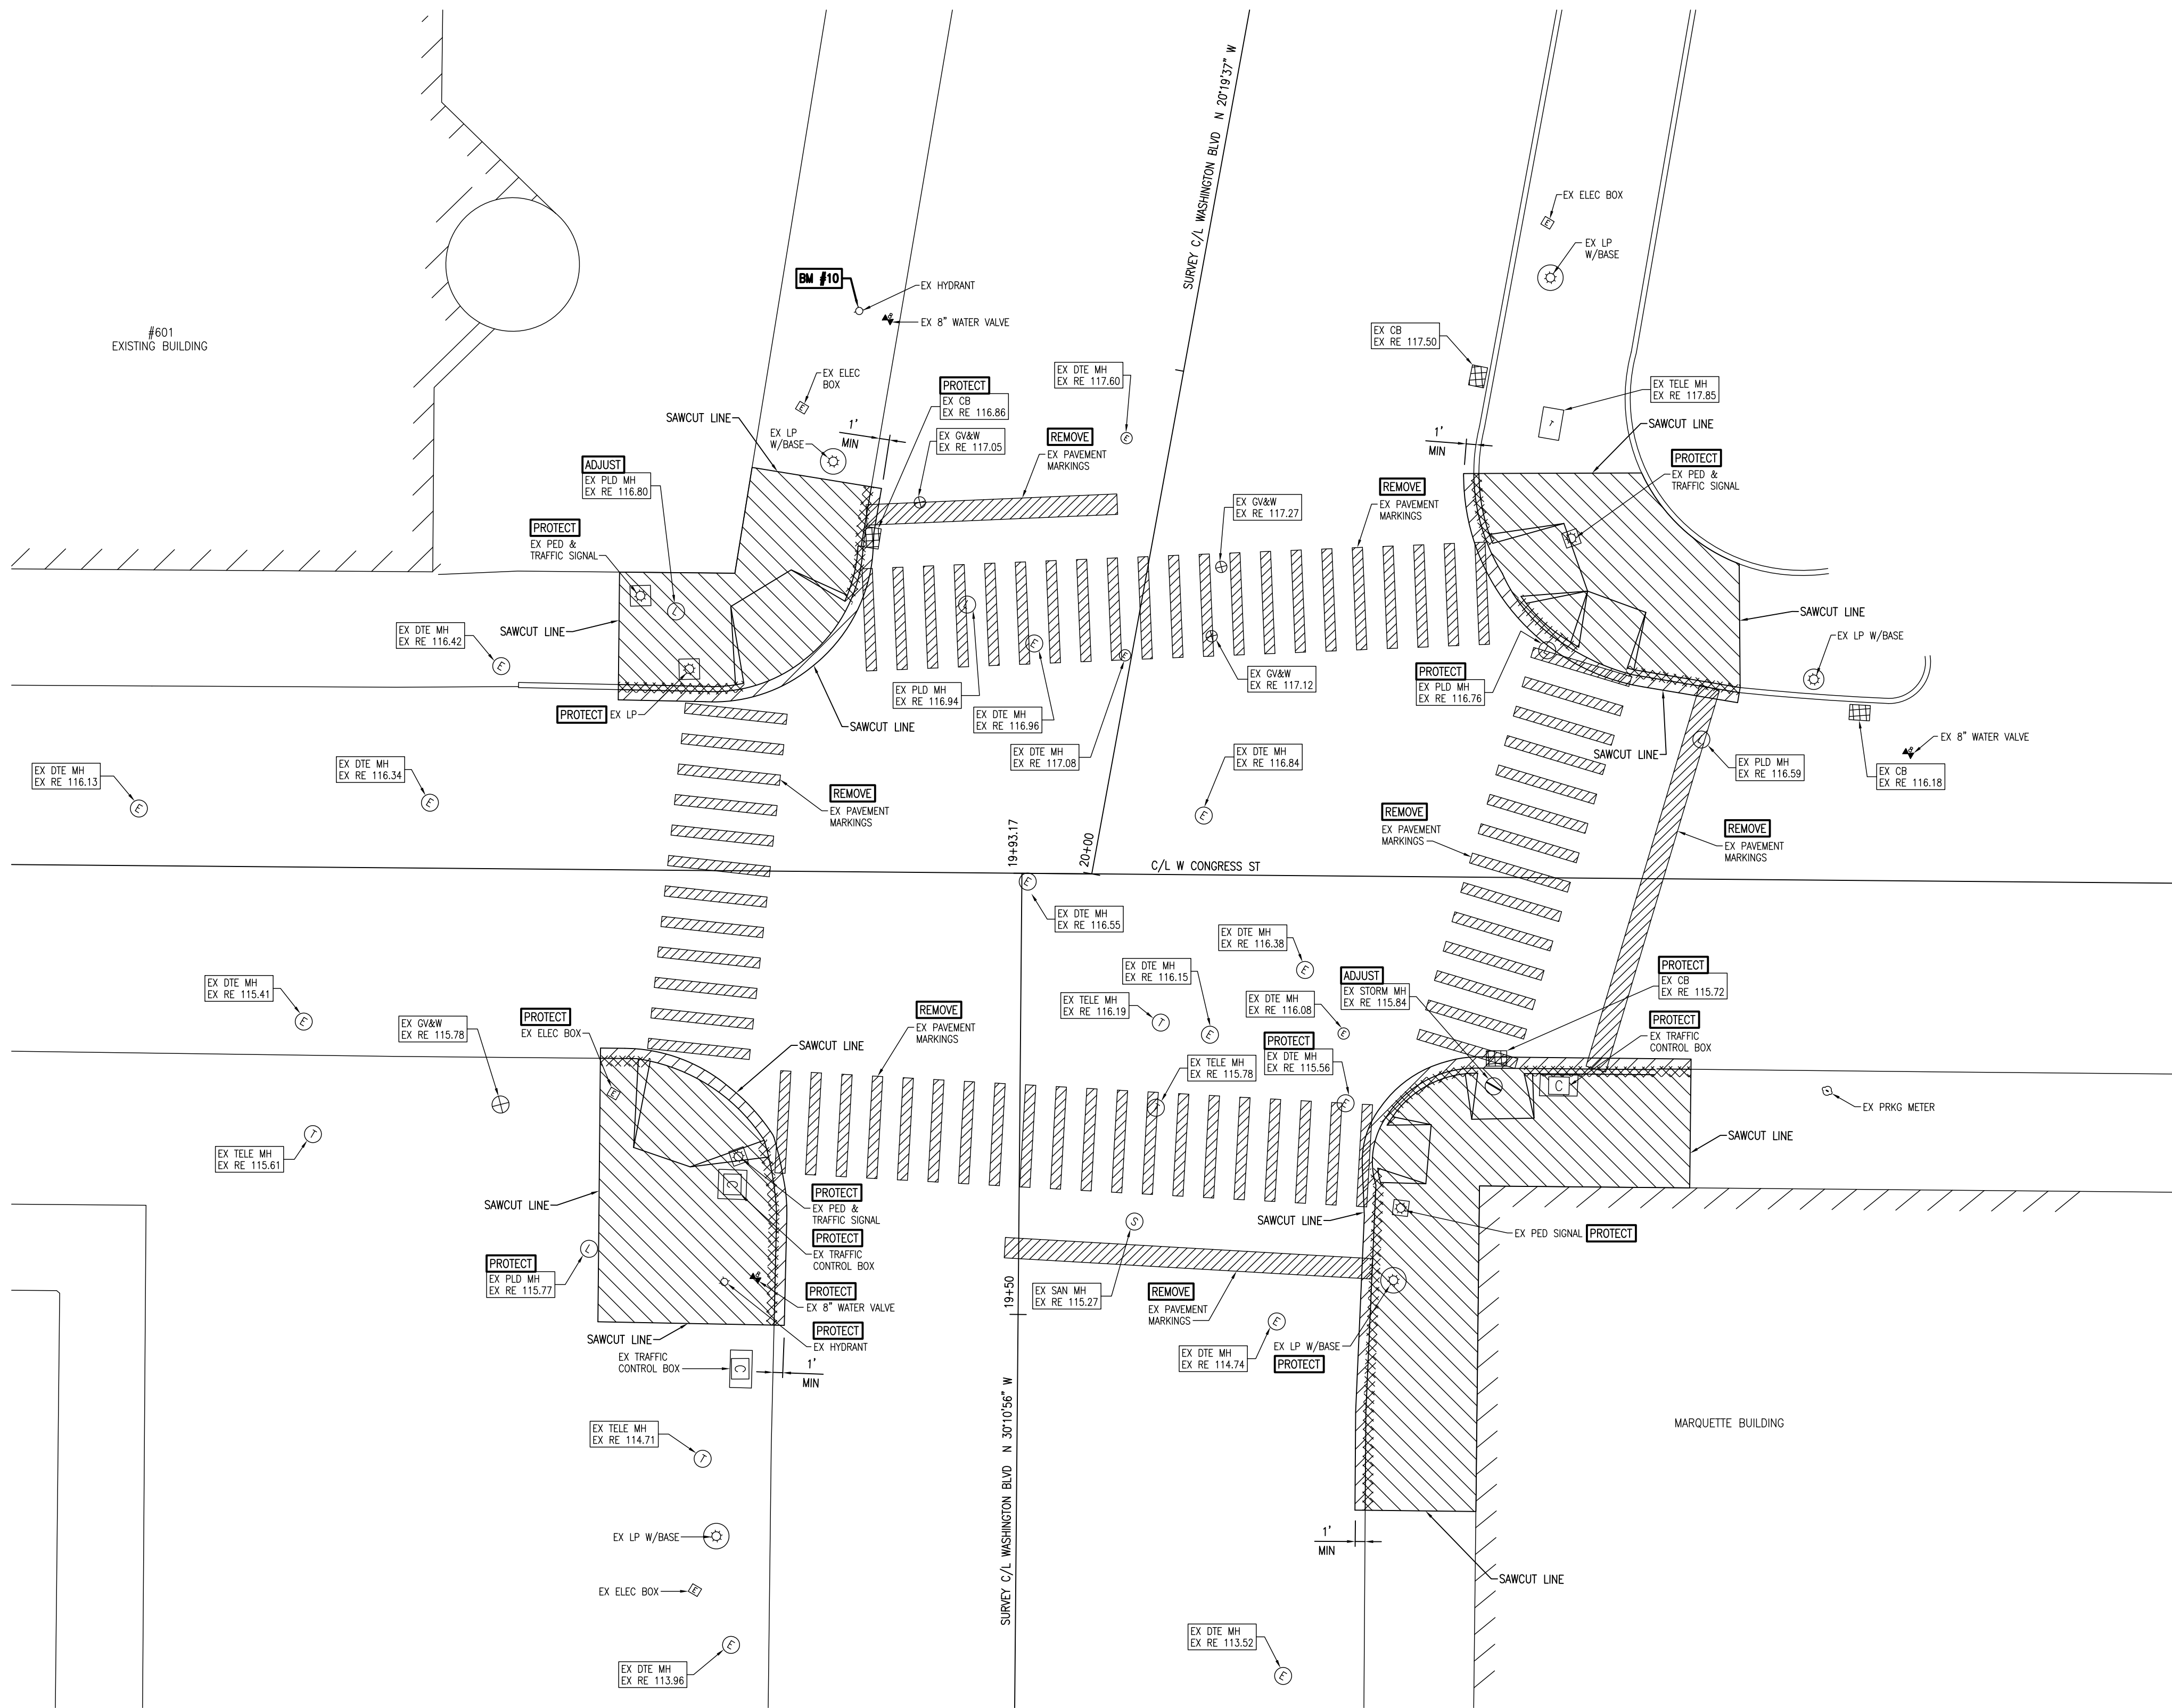

GENERAL NOTES


- THE ELEVATIONS SHOWN ARE CITY OF DETROIT VERTICAL DATUM. TO CONVERT THE ELEVATION VALUES SHOWN TO THE NATIONAL GEODATIC VERTICAL DATUM OF 1929 (COMMONLY REFERRED TO AS USGS OR USC & GS DATUM), ADD 479.755'.
- ALL MATERIALS AND WORKMANSHIP FOR R.O.W. IMPROVEMENTS SHALL MEET THE STANDARDS, REGULATIONS, ORDINANCES AND SPECIFICATIONS OUTLINED IN THE CITY OF DETROIT ENGINEERING DEPARTMENT STANDARDS AND SPECIFICATIONS FOR PAVING AND RELATED CONSTRUCTION.
- SOD ALL LAWN AREAS WHICH ARE DISTURBED DURING CONSTRUCTION. IF A DISTURBED AREA CANNOT BE PERMANENTLY STABILIZED IMMEDIATELY AFTER AN EARTH CHANGE OR IF ACTIVITY CEASES FOR MORE THAN 30 DAYS, TEMPORARY SEEDING SHALL BE IMPLEMENTED WITHIN 5 DAYS.
- REFER TO THIS SHEET FOR ON-SITE DEMOLITION.
- FOR PROTECTION OF UNDERGROUND UTILITIES, THE CONTRACTOR SHALL DIAL 1-800-482-7171 A MINIMUM OF THREE (3) WORKING DAYS PRIOR TO EXCAVATION IN THE VICINITY OF UTILITY LINES. ALL "MISS DIG" PARTICIPATING MEMBERS WILL THUS BE ROUTINELY NOTIFIED. THIS DOES NOT RELIEVE THE CONTRACTOR OF THE RESPONSIBILITY OF NOTIFYING UTILITY OWNERS WHO MAY NOT BE PART OF THE "MISS DIG" ALERT SYSTEM.
- CONSTRUCTION SAFETY IS THE SOLE RESPONSIBILITY OF THE CONTRACTOR; NEITHER THE OWNER NOR THE ENGINEER SHALL BE EXPECTED TO ASSUME ANY RESPONSIBILITY FOR SAFETY OF THE WORK, OF PERSONS ENGAGED IN THE WORK, OF ANY NEARBY STRUCTURES OR OF ANY OTHER PERSONS.
- A MINIMUM OF ONE LANE OF TRAFFIC SHALL BE MAINTAINED AT ALL TIMES ON WASHINGTON BLVD AND CONGRESS ST DURING CONSTRUCTION.
- CONTRACTOR IS RESPONSIBLE FOR AVOIDING ANY CONFLICT BETWEEN THE PROPOSED CONSTRUCTION AND THE EXISTING UTILITIES.
- PAVEMENT AREAS AND CURB REMOVAL SHALL BE EXTENDED WHEN THE ADJACENT PAVEMENT AREA OR CURB LENGTH IS LESS THAN 6 FEET IN LENGTH OR WITHIN 6 FEET OF AN EXISTING JOINT.
- ALL PAVEMENT REMOVALS AND CURB REMOVALS SHALL BE SAWCUT FULL DEPTH.
- CONTRACTOR SHALL REMOVE THE EXISTING STOP BARS AND CROSSWALKS PER SECTION 812 OF THE MICHIGAN DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR CONSTRUCTION. PAYMENT FOR WORK SHALL BE INCLUDED IN THE PAY ITEM "REM SPEC MRKG".

REMOVAL QUANTITIES
THIS SHEET

200	FT	CURB, REM, MODIFIED
210	SYD	SIDEWALK, REM
12	CYD	EXCAVATION, EARTH, MODIFIED
869	SFT	REM SPEC MRKG

NOTES: a) CURB, REM, MODIFIED INCLUDES REMOVAL OF EXISTING PAVEMENT ADJACENT TO CURB AND HMA SURFACING OVER THE PAVEMENT.
b) REMOVAL OF EXPOSED AGGREGATE CONCRETE IS INCLUDED IN PAYMENT FOR "SIDEWALK, REM".

LEGEND

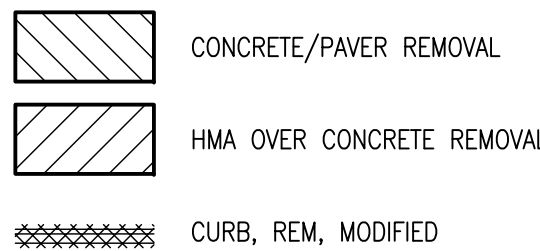

DEMOLITION PLAN



HH Engineering LTD
220 Bagley, Suite 500
Detroit, Michigan 48226
phone (313) 963-6560
fax (313) 963-6960
hhimes@hhengltd.com

Hamilton Anderson Associates
1435 Randolph, Suite 200
Detroit, Michigan 48226

ph (313) 964-0270, fax (313) 964-0170, www.hamilton-anderson.com

REVISION #	DATE

W CONGRESS ST & WASHINGTON BLVD ADA HANDICAP RAMPS – DETROIT, MICHIGAN				SHEET NO. 139
DATE	SCALE	JOB NO.	DESIGN UNIT	SHEET NO.
07/09/09	1" = 10'	C0720	HIMES	R-21



C0720 07/09/09