


**NOTES**  
 Concrete - 20 c-y (approx)  
 Reinforcing - #4s

Concrete to be composed of 1 part cement, 2 parts sand and 3 parts stone. Exposed corners to be boveled  $\frac{3}{4}$ ".  
 Reinforcing bars to be securely wired together at each intersection. At splices the shall lap for a length of 24 diameters and shall be securely wrapped with iron wire.

NO	SIZE	LENGTH	MARK
10	$\frac{3}{4}$ "	1'-6"	E
4	$\frac{3}{4}$ "	8'-0"	F
4	$\frac{3}{4}$ "	7'-0"	F
4	$\frac{3}{4}$ "	5'-0"	F
2	$\frac{3}{4}$ "	28'-0"	F
32	$\frac{3}{4}$ "	6'-0"	G
20	$\frac{3}{4}$ "	4'-0"	G
4	$\frac{3}{4}$ "	3'-0"	G

**M.C.R.R. - MAIN LINE DIV.**  
**BRIDGE 0.82 HOWARD ST**  
**CHANGES IN WEST ABUTMENT**  
 ((EXPANSION END))  
 SCALE: 1" = 1'-0"  
 DRAWN BY: J.E.H. - Mar 15 1921  
 CHECKED BY: J.H. - Apr 27 1921  
 REVISION: J.C.M. - 5-15-21 - 19  
 APPROVED: [Signature]  
 BRIDGE ENGINEER

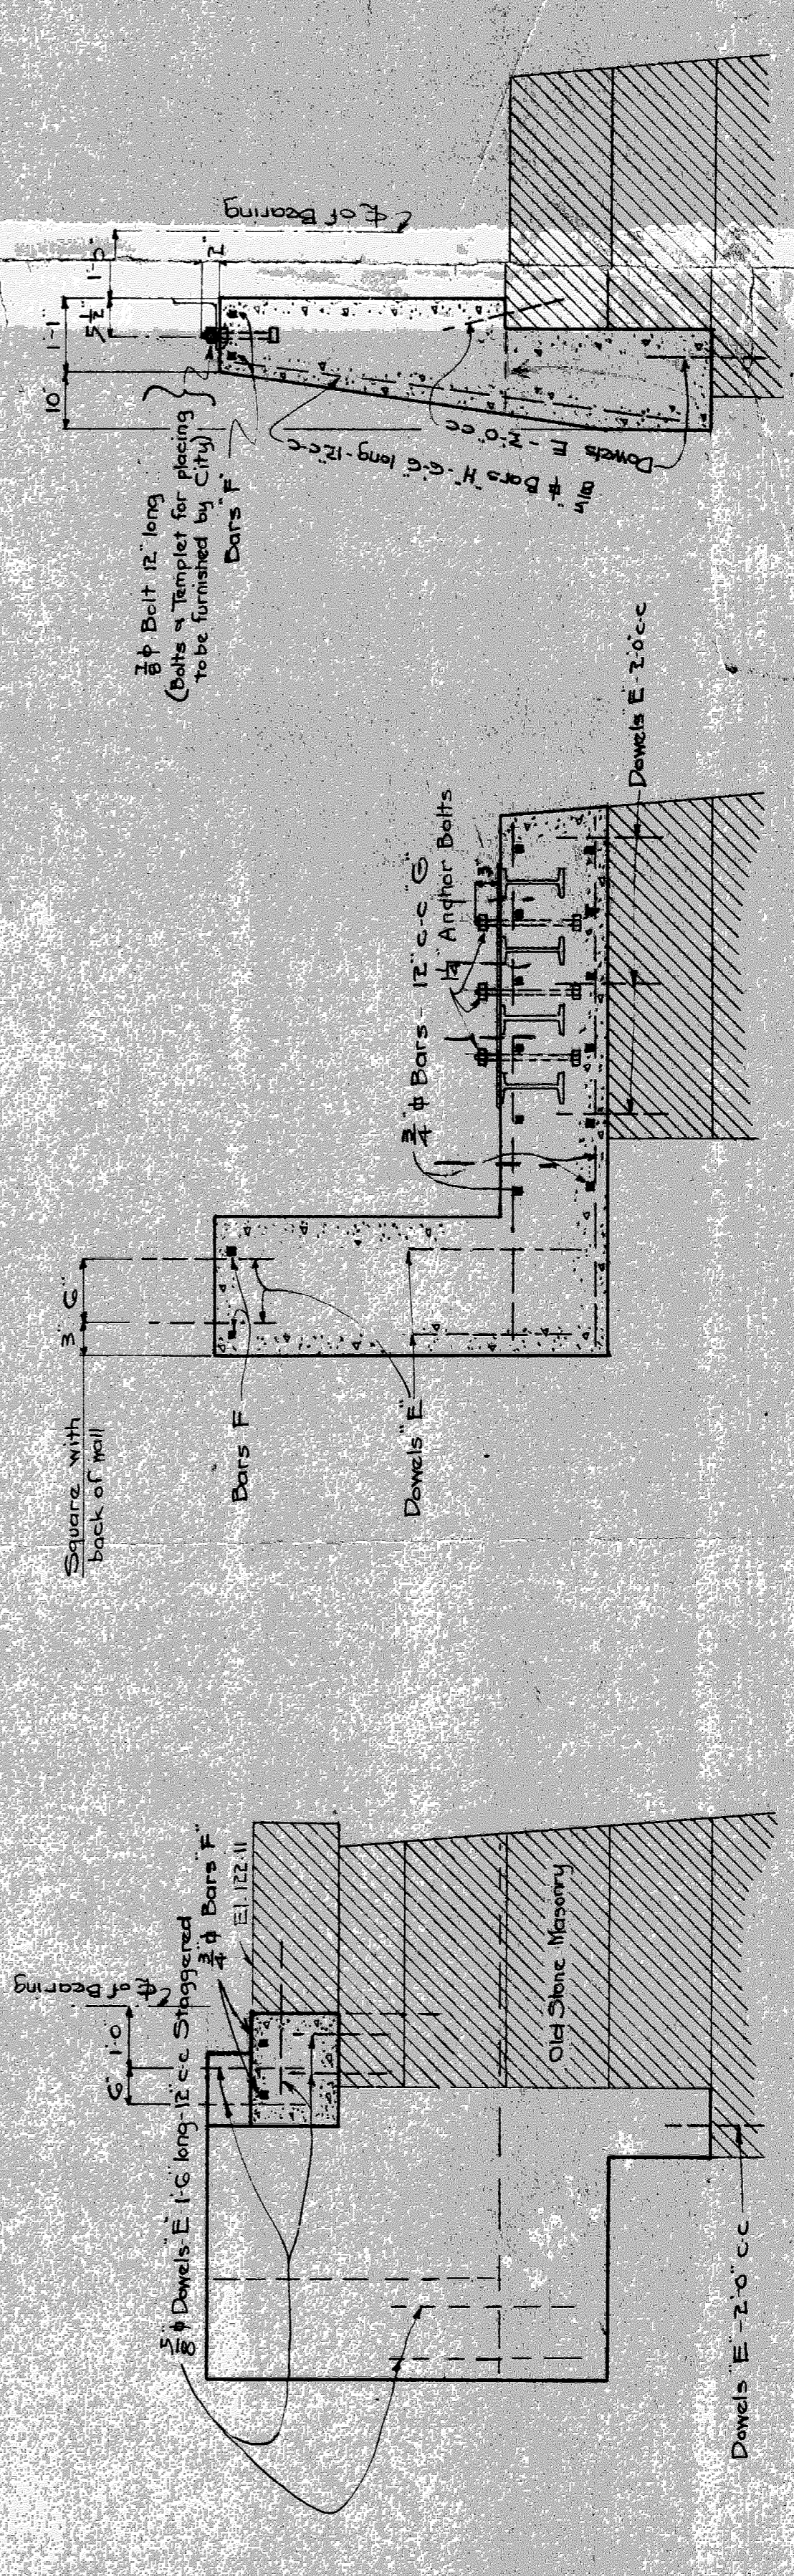

*where shown*  
*Proposed*  
*Construction*  
*Suggestion*  
 10/5/21

SEC. SS - As Shown  
 SEC. HH - Opposite Hand  
 SEC. KK