


NOTES
 Concrete - 20 c.y. (approx)
 Reinforcing - 1140#
 Concrete to be composed of 1 part cement,
 2 parts sand and 3 parts stone. Exposed
 corners to be beveled $\frac{1}{4}$ "
 Reinforcing bars to be securely wired together
 at each intersection. At splices the shall lap for
 a length of 24 diameters and shall be
 securely wrapped with iron wire.

| NO. | SIZE | LENGTH | MARK |
|-----|-----------------|--------|------|
| 190 | $\frac{3}{8}$ " | 1'-0" | E |
| 4 | $\frac{3}{8}$ " | 8'-0" | F |
| 4 | $\frac{3}{8}$ " | 7'-0" | F |
| 4 | $\frac{3}{8}$ " | 5'-0" | F |
| 2 | " | 28'-0" | F |
| 32 | $\frac{3}{4}$ " | 5'-0" | G |
| 76 | " | 4'-0" | H |
| 4 | " | 3'-0" | I |

M.C.R.R. - MAIN LINE DIV.
 BRIDGE 0-82 HOWARD ST
 CHANGES IN WEST ABUTMENT
 (EXPANSION END)
 SCALE: 1" = 1'-0"
 DRAWN BY: J.S.H., MAR. 15, 1921.
 CHECKED BY: J.L.Z., MAR. 19, 1921.
 APPROVED BY: J.L.Z., MAR. 19, 1921.
 PROJECT NO. 100-51-1-117
 SHEET NO. 100-51-1-117

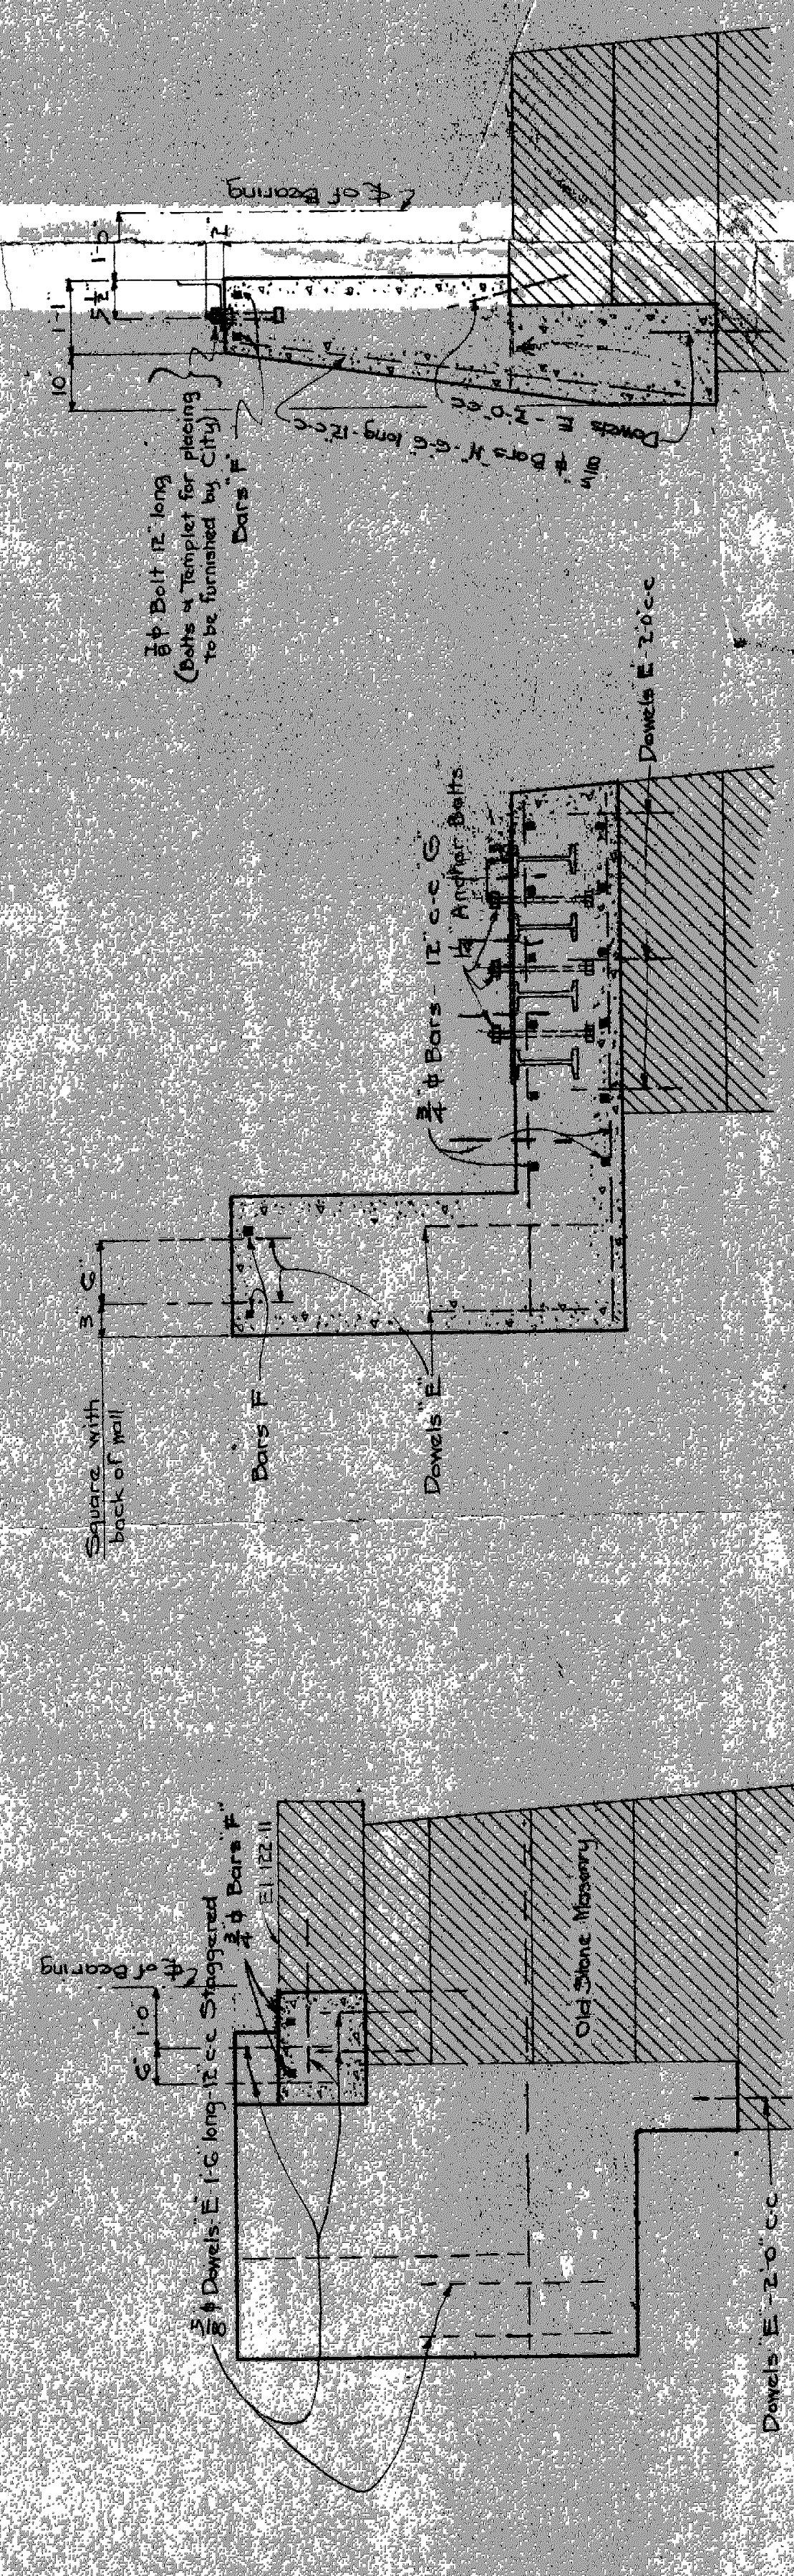

SEC. CC - As Shown
 SEC. LL - Opposite Hand

where shown
particular
Construction
to be made
as shown
on page 100-51-1-117