


NOTES
 Concrete - 20 c. y. (approx)
 Reinforcing - #14s
 Concrete to be composed of 1 part cement, 2 parts sand and 3 parts stone. Exposed corners to be beveled $\frac{3}{4}$ ".
 Reinforcing bars to be securely wired together at each intersection. At splice the shell lap be a length of 24 diameters and shall be securely wrapped with iron wire.

NO	SIZE	LENGTH	MARK
150	#14	1'-6"	E
4	#14	6'-0"	F
4	#14	7'-0"	F
4	#14	5'-0"	F
2	#14	28'-0"	F
2E	#14	6'-0"	G
20	#14	4'-6"	G
4	#14	3'-0"	G

M.C.R.R. - MAIN LINE DIV.
 BRIDGE 0-82 HOWARD ST
 CHANGES IN WEST ABUTMENT
 (EXPANSION END)
 SCALE: 1" = 1'-0"
 DRAWN BY J.E.H. MAR. 6, 1921
 CHECKED BY W.F. 5/27, 1921
 REVISIONS: J.C.H. 5/25, 1921
 APPROVED: [Signature]
 BRIDGE ENGINEER

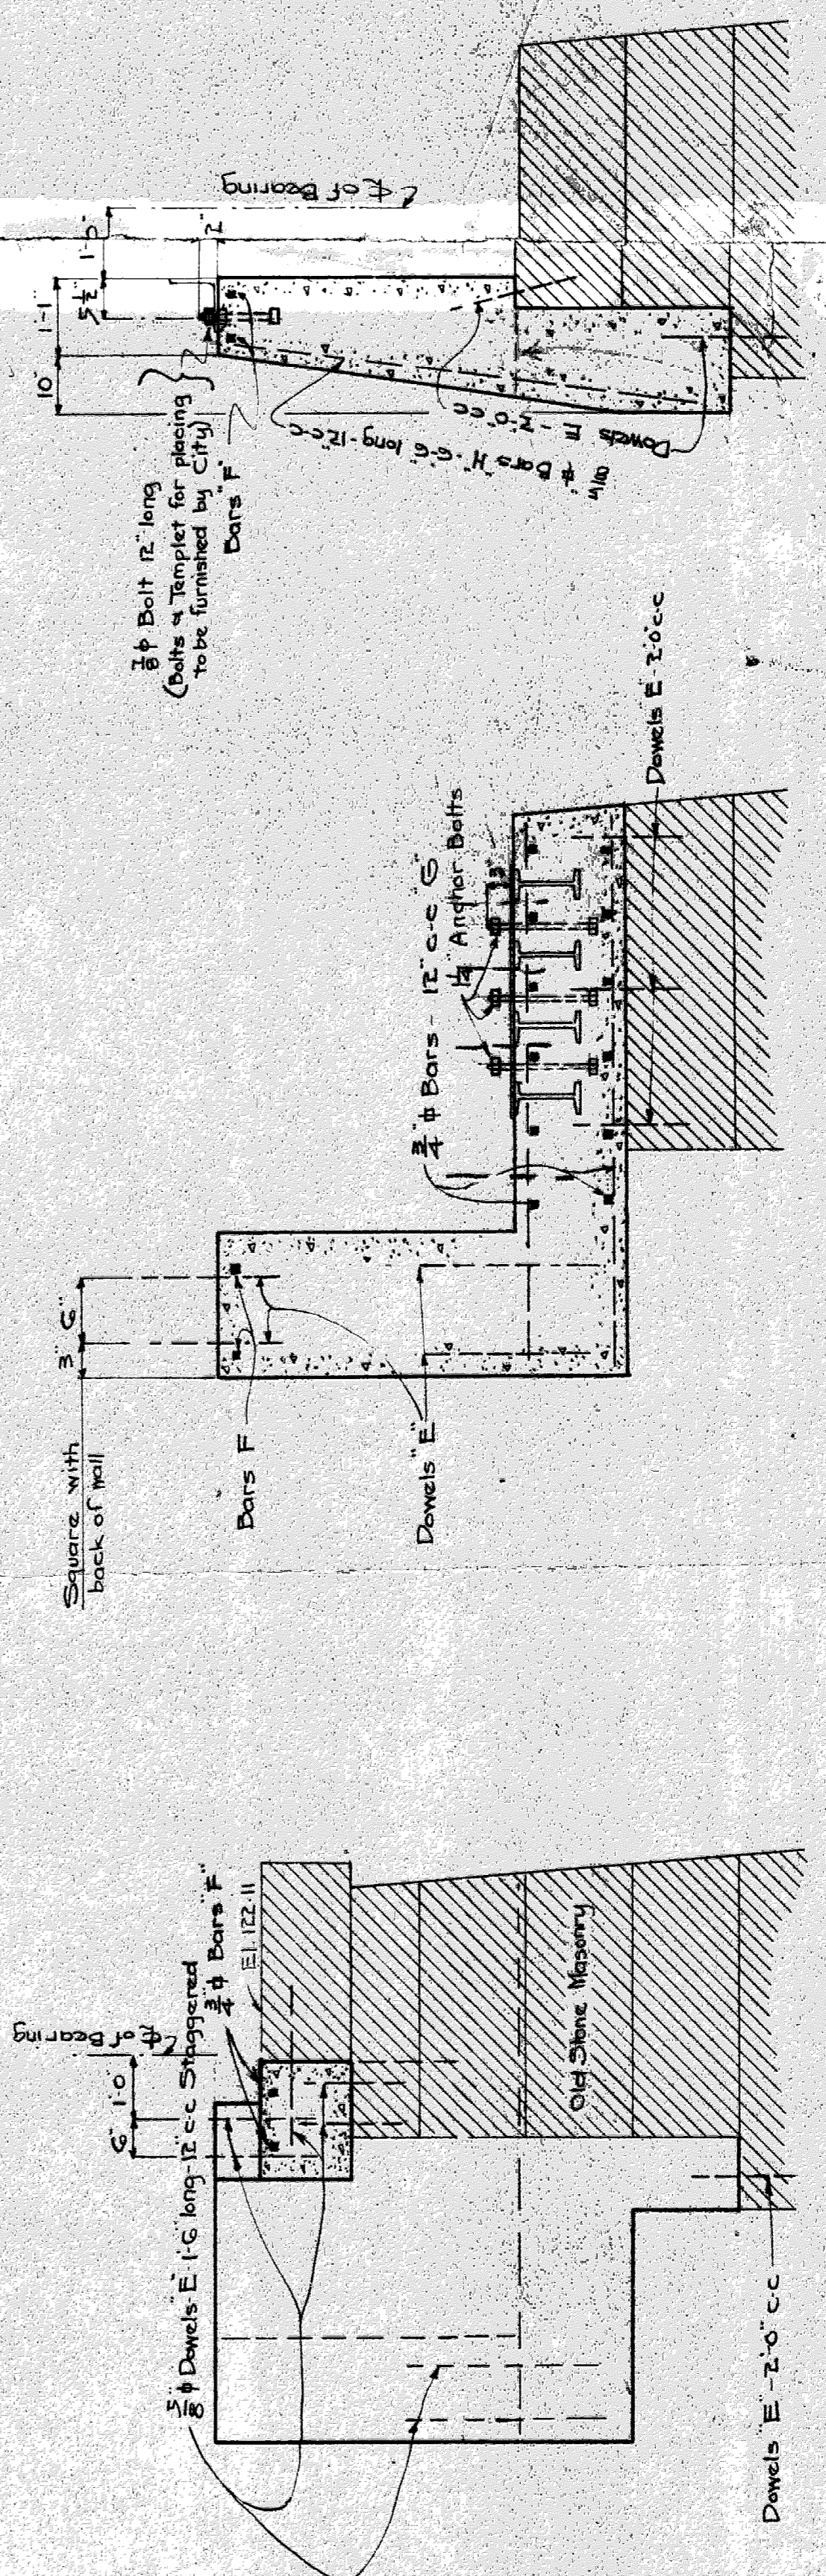

SEC. 11-11 - As Shown
 SEC. 11-11 - Opposite Hand

SEC. 11-11
 SEC. 11-11

where shown
Propose to be taken
Concretions
Suggest
 W.B. 9-21