


POUR	AMT (CYDS)
A	39.7
B	53.0
C	54.1
D	62.0
TOTAL CONC.: 208.8	

ITEM	UNIT	SPAN 14	SPAN 15	AMOUNT
BRIDGE BARRIER RAILING, TYPE 5 (MOD) FOR RAILING REPLACEMENT	LFT	178.0	225.5	
CONCRETE MEDIAN BARRIER (SP)	LFT	89.0	113.4	
SCARIFYING	SYD	646.2	798.0	
HYDRODEMOLISHING - FIRST PASS	SYD	646.2	798.0	
HYDRODEMOLISHING - SECOND PASS	SYD	14.9	9.2	
DRAIN CASTING ASSEMBLY - TYPE 1	EACH	0	1	
CONSTRUCTING BRIDGE DECK SURFACE	SYD	617.1	767.5	
FALSE DECKING	SYD	0	798.0	
DRAIN CASTING ASSEMBLY - TYPE 2	EACH	0	1	

THE CITY OF DETROIT  
DEPARTMENT OF PUBLIC WORKS  
MOUNT ELLIOTT-MOUND ROAD GRADE SEPARATION  
SUPERSTRUCTURE DETAILS

DESIGNED BY	DATE	6/73
CHECKED BY	DATE	1/74
REVISIONS	SHEET	42 OF 57

B01 of 82-22-48

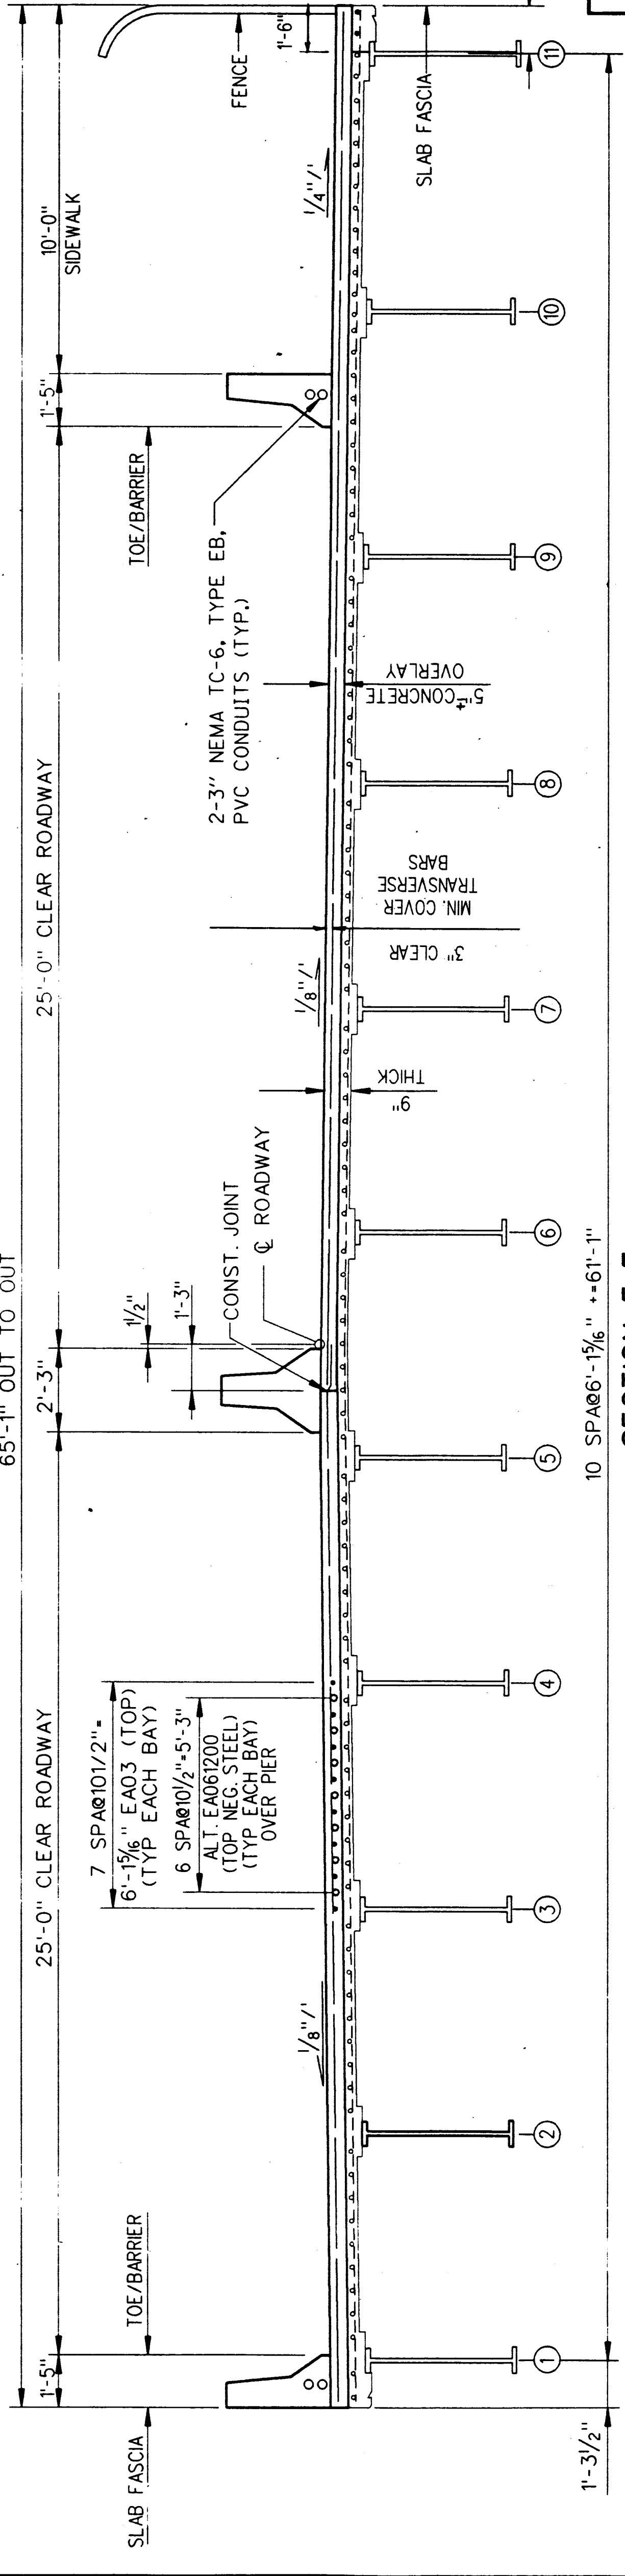

NOTES:  
WORK THIS SHEET WITH SHEETS 26, 27, 33 THRU 41 AND 43 THRU 51.  
FOR PEDESTRIAN FENCING DETAILS, SEE SHEETS 52 & 53.  
FOR ADDITIONAL NOTES SEE SHEET 41.

NO.	DESCRIPTION	DATE	BY

SECTION F-F  
SCREENED ELEVATIONS

	PIER 13	EXPT	1/4	1/2	3/4	EXPT	PIER 14	1/4	1/2	3/4	PIER 15
WEST BARRIER	175.18	174.99	174.32	173.65	172.99	172.32	171.65	170.98	170.31	169.64	168.97
MEDIAN WEST	175.38	175.19	174.52	173.84	173.18	172.51	171.84	171.17	170.50	169.83	169.16
CONST. JT	175.37	175.18	174.51	173.84	173.18	172.51	171.84	171.17	170.50	169.83	169.16
MEDIAN EAST	175.37	175.18	174.51	173.84	173.18	172.51	171.84	171.17	170.50	169.83	169.16
EAST BARRIER	175.04	174.85	174.18	173.51	172.85	172.18	171.51	170.84	170.17	169.50	168.83

