

PLAN	C-10-31-50
DATE	10/31/50
BY	J. CONSON
CHECKED	J. CONSON
APPROVED	J. CONSON
SCALE	1" = 50'



NO. OF MANHOLES	1
NO. OF CATCH BASINS	1
NO. OF TRENCHES	1
NO. OF VALVES	1
NO. OF CLEANOUTS	1
NO. OF MANHOLE COVERS	1
NO. OF TRENCH COVERS	1
NO. OF VALVE COVERS	1
NO. OF CLEANOUT COVERS	1
NO. OF MANHOLE FRAMES	1
NO. OF TRENCH FRAMES	1
NO. OF VALVE FRAMES	1
NO. OF CLEANOUT FRAMES	1

NO. OF MANHOLES	1
NO. OF CATCH BASINS	1
NO. OF TRENCHES	1
NO. OF VALVES	1
NO. OF CLEANOUTS	1
NO. OF MANHOLE COVERS	1
NO. OF TRENCH COVERS	1
NO. OF VALVE COVERS	1
NO. OF CLEANOUT COVERS	1
NO. OF MANHOLE FRAMES	1
NO. OF TRENCH FRAMES	1
NO. OF VALVE FRAMES	1
NO. OF CLEANOUT FRAMES	1

NO. OF MANHOLES	1
NO. OF CATCH BASINS	1
NO. OF TRENCHES	1
NO. OF VALVES	1
NO. OF CLEANOUTS	1
NO. OF MANHOLE COVERS	1
NO. OF TRENCH COVERS	1
NO. OF VALVE COVERS	1
NO. OF CLEANOUT COVERS	1
NO. OF MANHOLE FRAMES	1
NO. OF TRENCH FRAMES	1
NO. OF VALVE FRAMES	1
NO. OF CLEANOUT FRAMES	1

L. F. KEYS
J. CONSON
72 115
S.P.L. PEMBROKE
N.P.L. TROJAN

VAUGHAN
S.P.L. PEMBROKE
N.P.L. TROJAN
325 AI-10
7/3

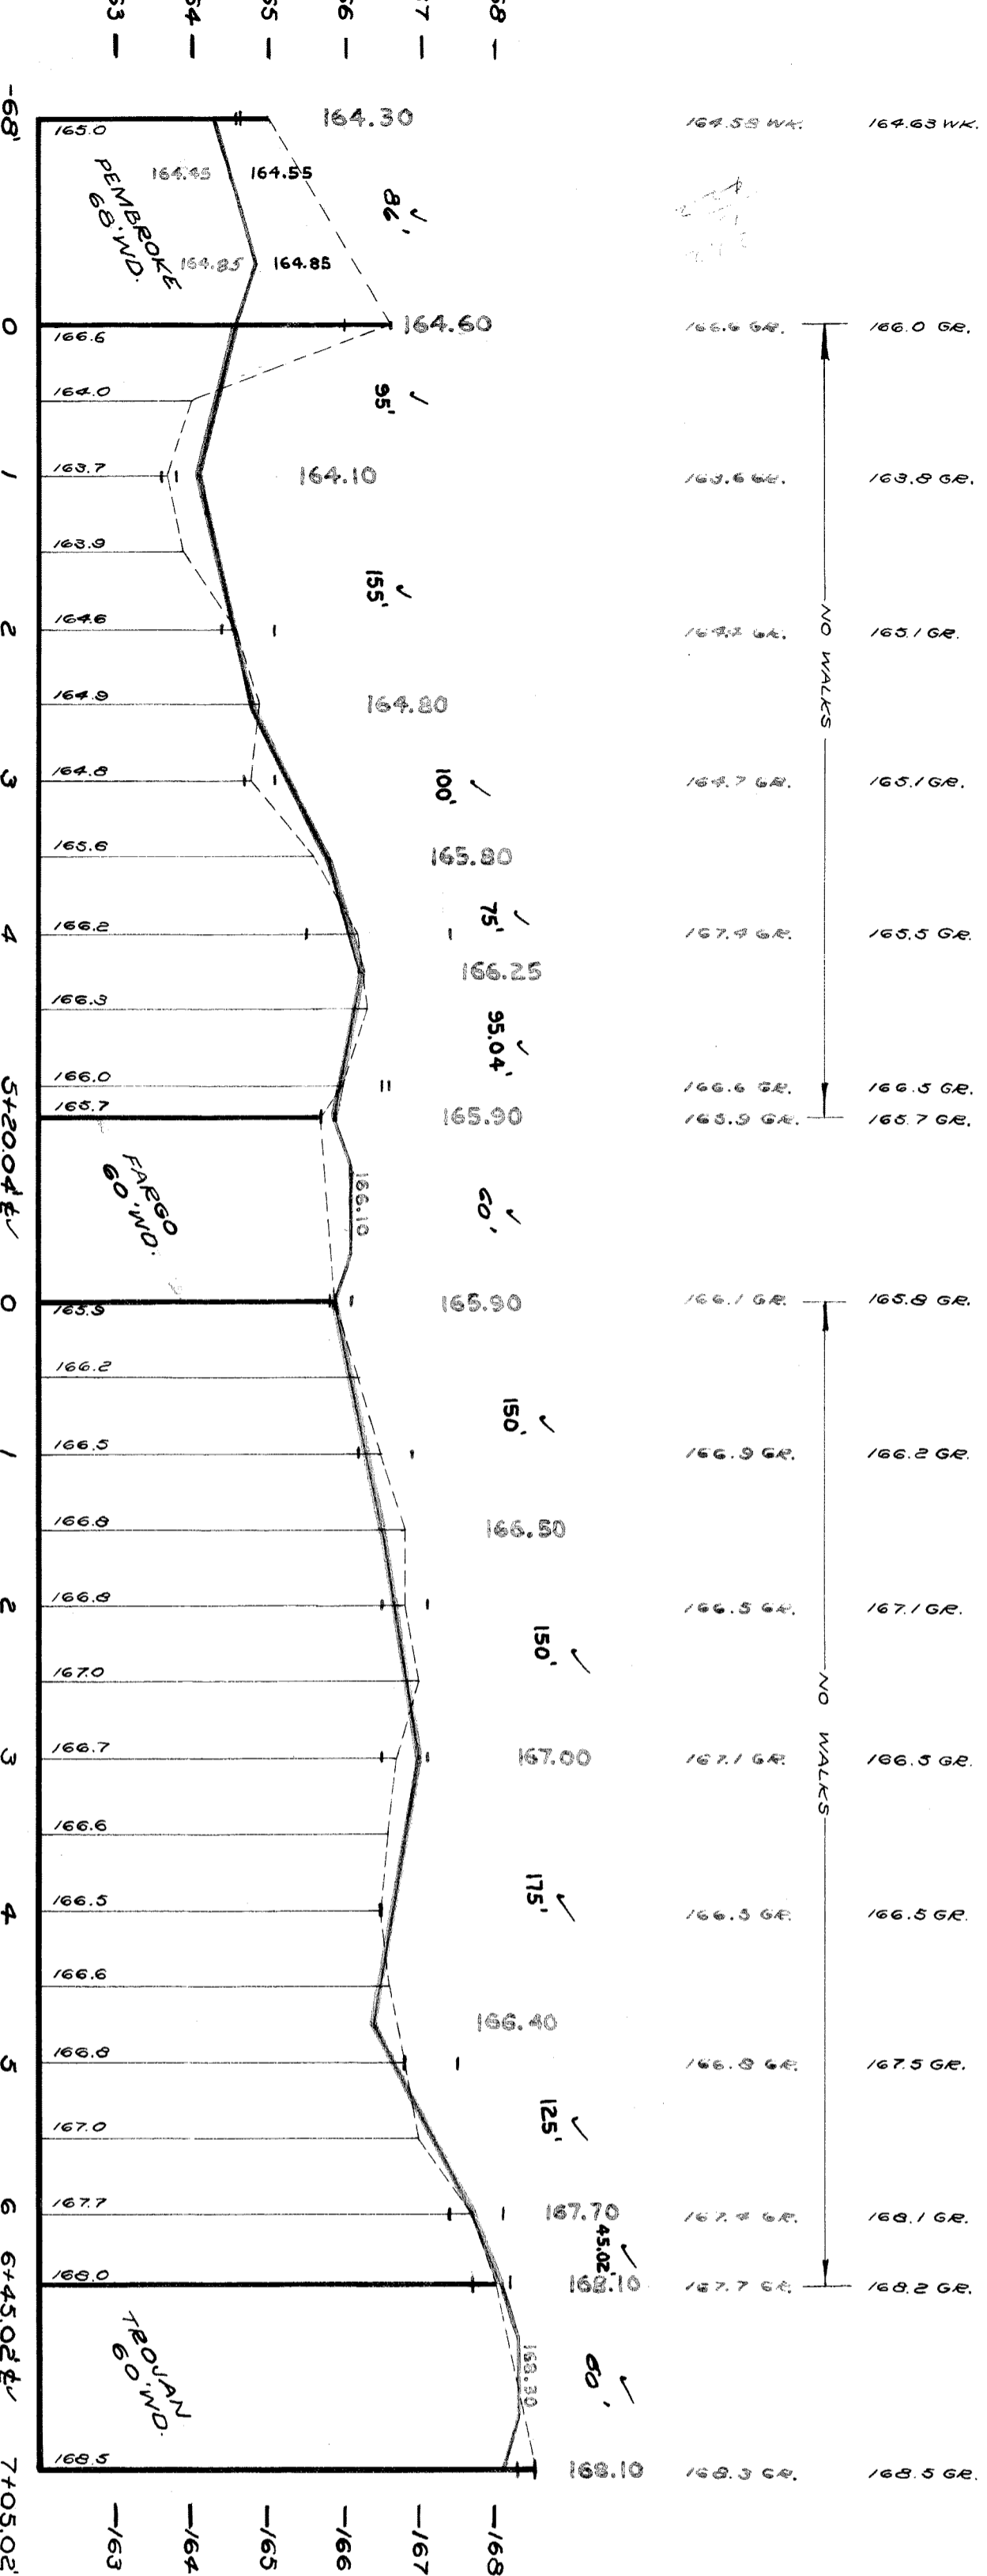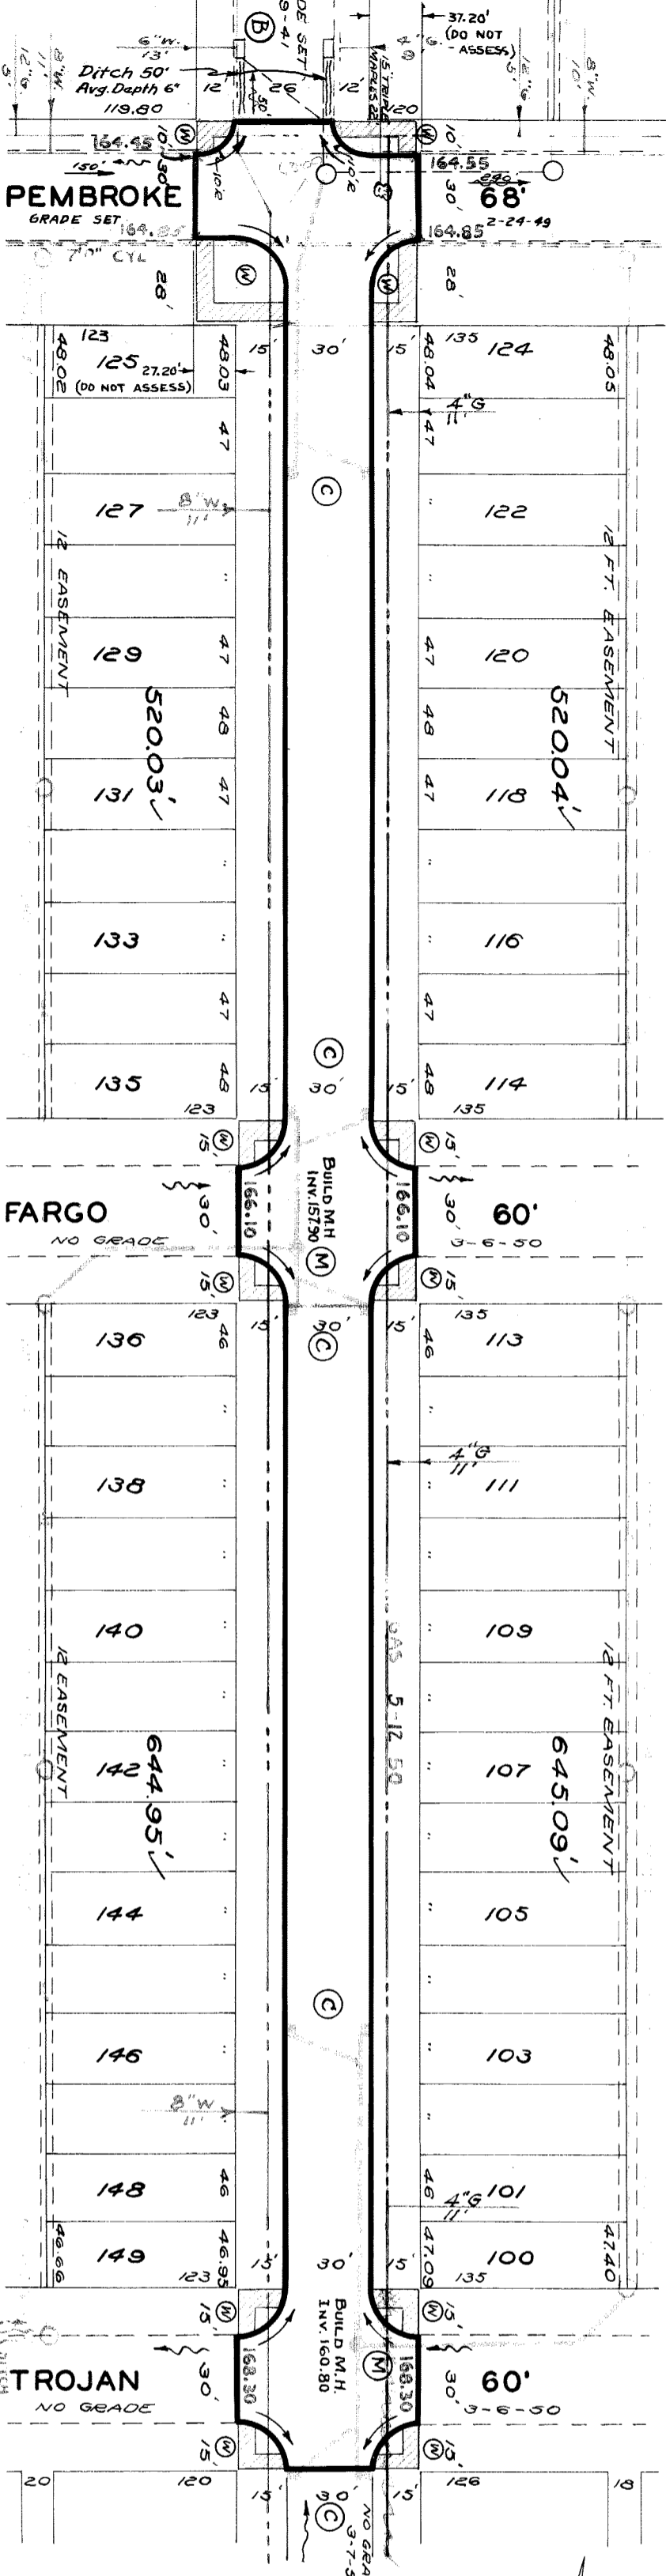

BENCH MARKS
ELEV
162.45
178.797

NOTES:
ADJUST TOPS OF TWO EXISTING CATCH BASINS TO TRUE ELEVATION 163.47, AT UNIT COST FOR CATCH BASIN ADJUSTMENT.
CONSTRUCT 10 STD. PIPE CATCH BASINS WITH STD. FRAMES AND GRATES AS REQUIRED; CONNECT TO EXISTING OUTLETS AS SHOWN. SEE DRWGS. C-326A & C-324.
CONSTRUCT TWO STD. MANHOLES COMPLETE.
CONSTRUCT 2174 SQ. FT. OF STANDARD 4" SIDEWALK.
ADJUST TOP OF 2 WATER MANHOLES.
ADJUST TOP OF ONE EXISTING SEWER MANHOLE.
RECONSTRUCT CONE OF ONE EXISTING SEWER MANHOLE, IF NECESSARY.
CONTRACTOR SHALL CONSTRUCT UNIFORM DITCHES WHERE SHOWN ON PLAN TO AVERAGE DEPTH INDICATED OR AS REQUIRED IN THE FIELD. 7 CU.YDS. INCLUDED UNDER EXCAVATION TOTALS FOR COST.
BACKFILL SEWER PIPE TRENCHES UNDER PROPOSED PAVEMENT WITH APPROVED SAND-GRAVEL MATERIAL; ELSEWHERE FILL AND TAMP WITH APPROVED EARTH LAYERS AS REQUIRED.
CONTRACTOR SHALL GRUB AND REMOVE 3-15" MAPLE TREES AS INDICATED ON PLAN @ UNIT BID COST PER TREE.
DIRT ROADWAYS AT ENDS OF PAVEMENT SHALL BE GRADED BACK AND STONED 6" DEEP UNIFORMLY FOR A DISTANCE OF 10 FT. TO MEET EXISTING GRADES. 165 CU.YDS. INCLUDED UNDER EXCAVATION TOTALS FOR COST.
ALL CURBS WITHIN STREET INTERSECTIONS TO BE SEPARATE TYPE II OR INTEGRAL TYPE III.

410908