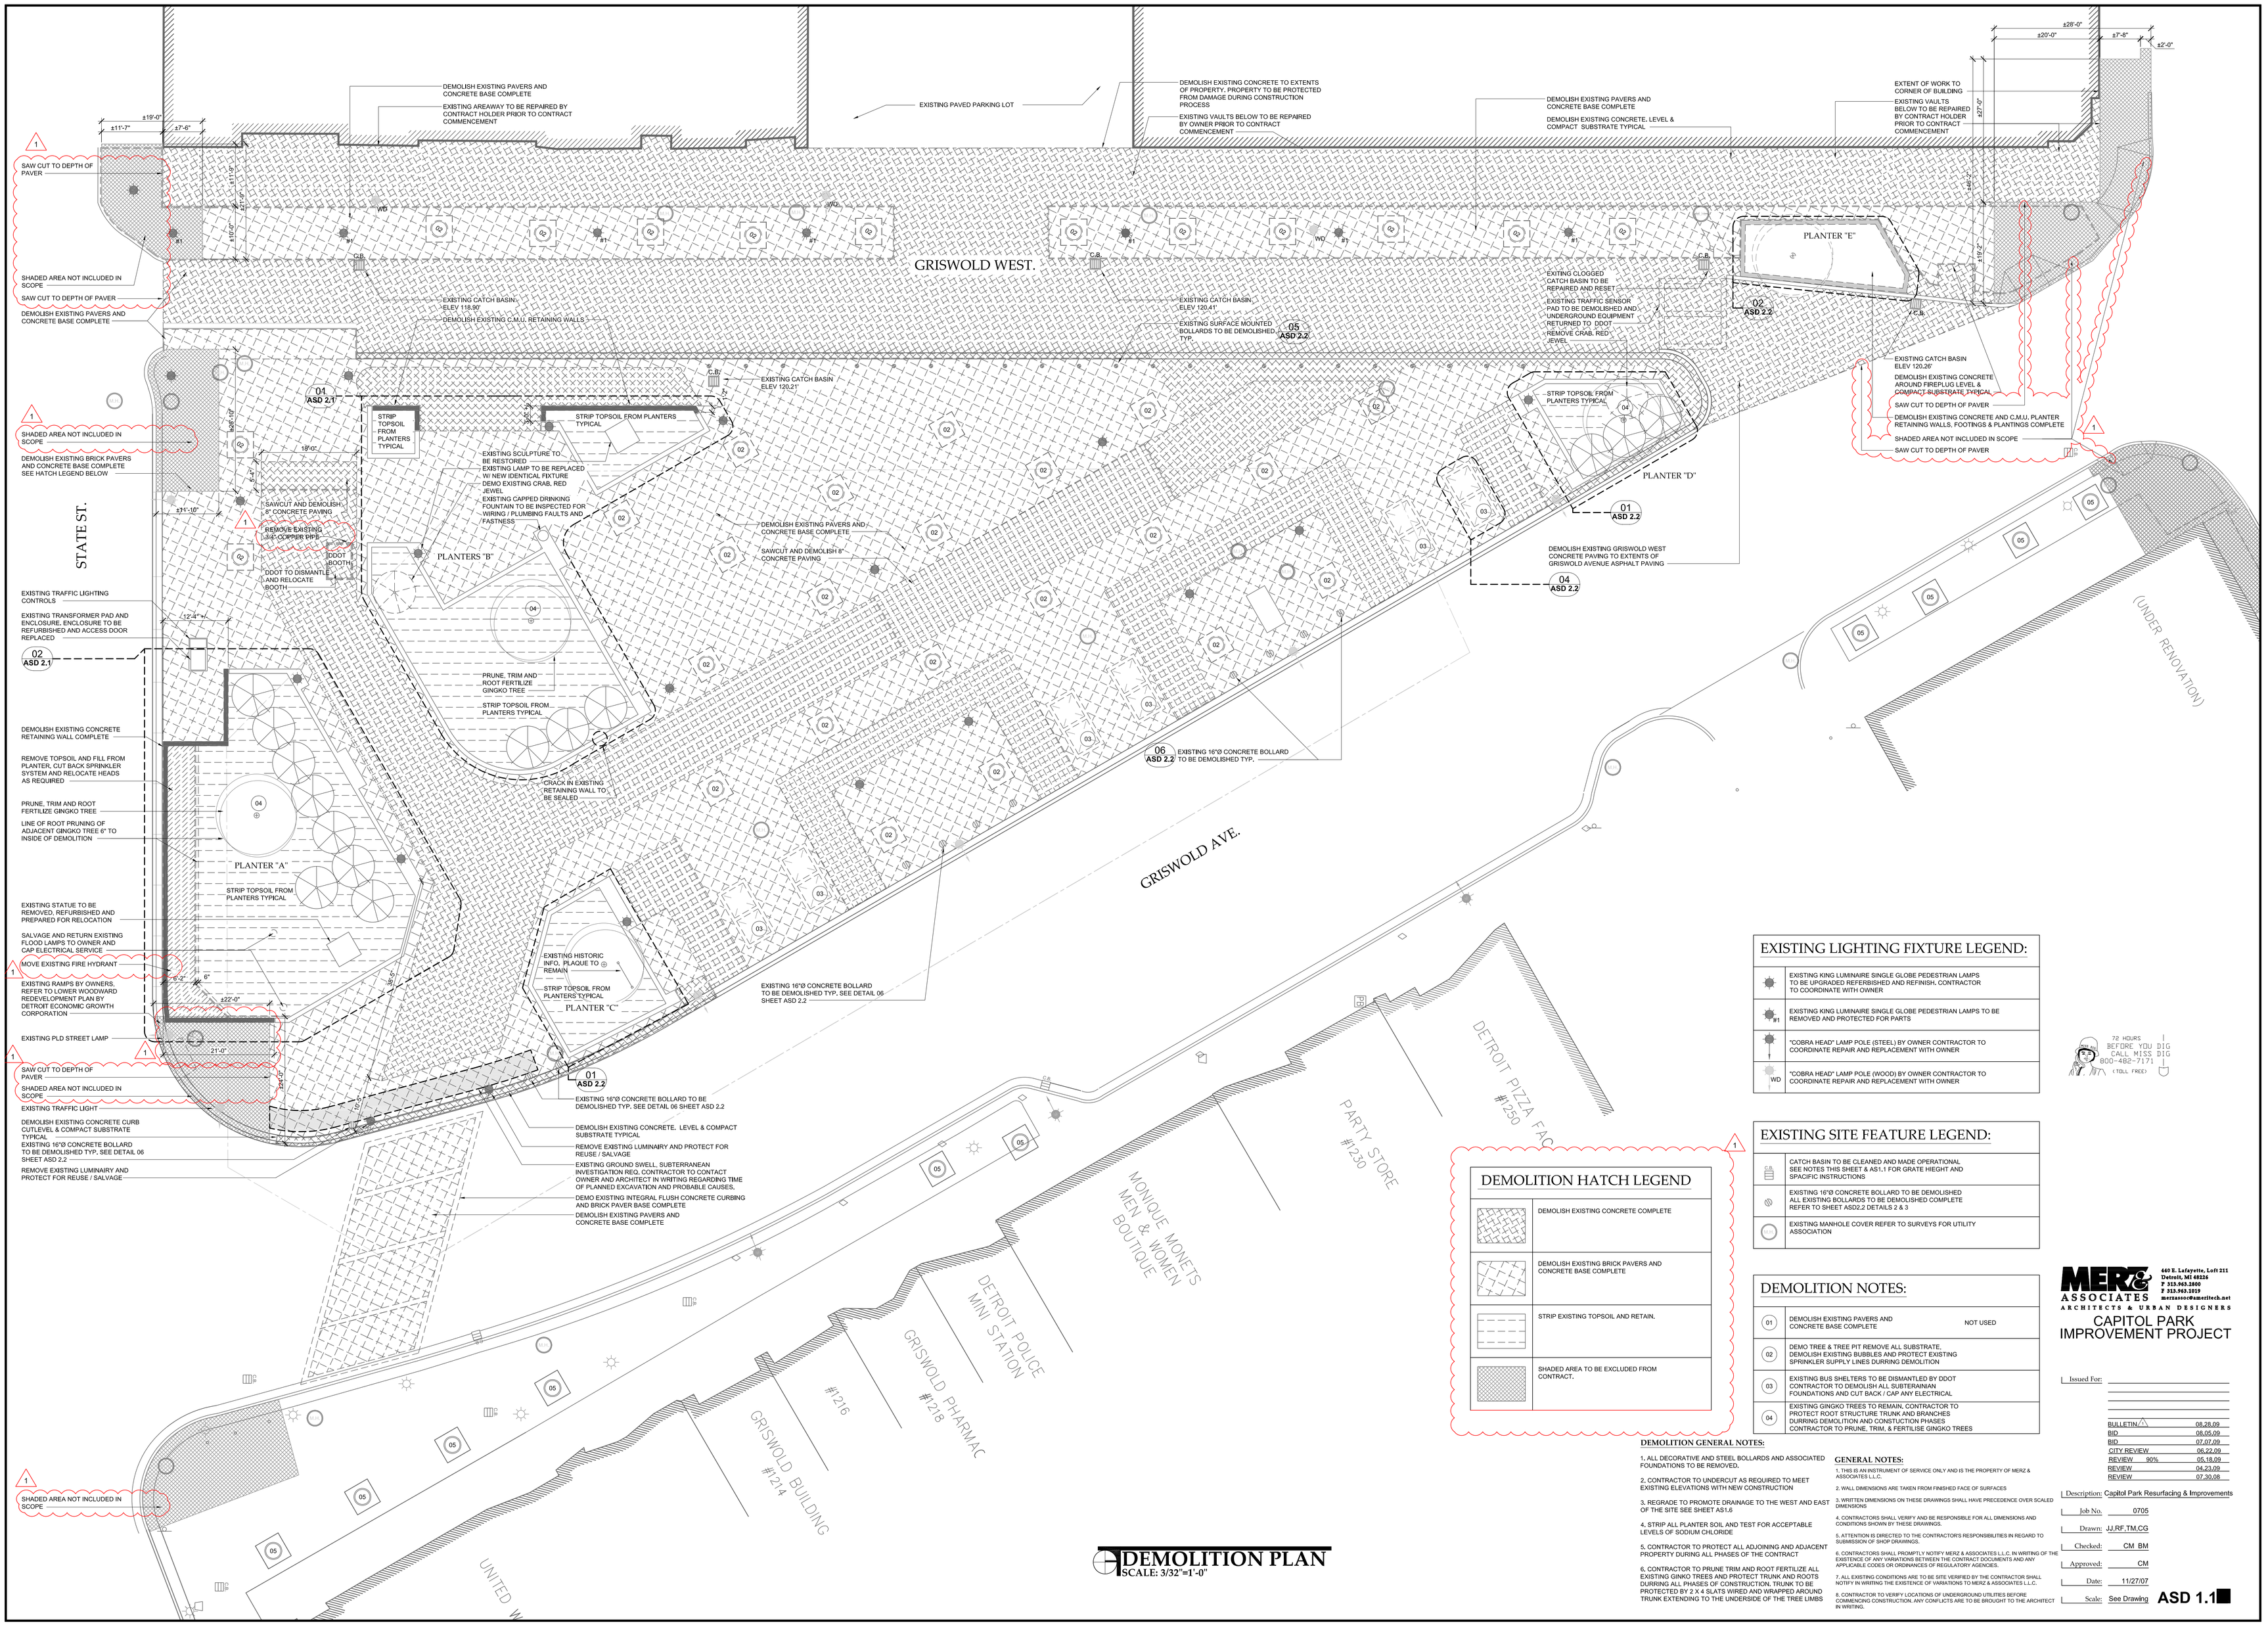

DEMOLITION PLAN
SCALE: 3/32"=1'-0"

EXISTING LIGHTING FIXTURE LEGEND:

	EXISTING KING LUMINAIRE SINGLE GLOBE PEDESTRIAN LAMPS TO BE UPGRADED REFERBISHED AND REFINISH. CONTRACTOR TO COORDINATE WITH OWNER
#1	EXISTING KING LUMINAIRE SINGLE GLOBE PEDESTRIAN LAMPS TO BE REMOVED AND PROTECTED FOR PARTS
	"COBRA HEAD" LAMP POLE (STEEL) BY OWNER CONTRACTOR TO COORDINATE REPAIR AND REPLACEMENT WITH OWNER
WD	"COBRA HEAD" LAMP POLE (WOOD) BY OWNER CONTRACTOR TO COORDINATE REPAIR AND REPLACEMENT WITH OWNER

72 HOURS BEFORE YOU DIG CALL MISS DIG 800-482-7171 (TOLL FREE)

EXISTING SITE FEATURE LEGEND:

	CATCH BASIN TO BE CLEANED AND MADE OPERATIONAL SEE NOTES THIS SHEET & AS1.1 FOR GRATE HIEGHT AND SPACIFIC INSTRUCTIONS
	EXISTING 16"Ø CONCRETE BOLLARD TO BE DEMOLISHED ALL EXISTING BOLLARDS TO BE DEMOLISHED COMPLETE REFER TO SHEET ASD2.2 DETAILS 2 & 3
	EXISTING MANHOLE COVER REFER TO SURVEYS FOR UTILITY ASSOCIATION

DEMOLITION HATCH LEGEND

	DEMOLISH EXISTING CONCRETE COMPLETE
	DEMOLISH EXISTING BRICK PAVERS AND CONCRETE BASE COMPLETE
	STRIP EXISTING TOPSOIL AND RETAIN.
	SHADED AREA TO BE EXCLUDED FROM CONTRACT.

DEMOLITION NOTES:

01	DEMOLISH EXISTING PAVERS AND CONCRETE BASE COMPLETE	NOT USED
02	DEMO TREE & TREE PIT REMOVE ALL SUBSTRATE, DEMOLISH EXISTING BUBBLES AND PROTECT EXISTING SPRINKLER SUPPLY LINES DURRING DEMOLITION	
03	EXISTING BUS SHELTERS TO BE DISMANTLED BY DDOT CONTRACTOR TO DEMOLISH ALL SUBTERANIAN FOUNDATIONS AND CUT BACK / CAP ANY ELECTRICAL	
04	EXISTING GINGKO TREES TO REMAIN, CONTRACTOR TO PROTECT ROOT STRUCTURE TRUNK AND BRANCHES DURRING DEMOLITION AND CONSTUCTION PHASES CONTRACTOR TO PRUNE, TRIM, & FERTILISE GINGKO TREES	

DEMOLITION GENERAL NOTES:

1. ALL DECORATIVE AND STEEL BOLLARDS AND ASSOCIATED FOUNDATIONS TO BE REMOVED.

2. CONTRACTOR TO UNDERCUT AS REQUIRED TO MEET EXISTING ELEVATIONS WITH NEW CONSTRUCTION

3. REGRADE TO PROMOTE DRAINAGE TO THE WEST AND EAST OF THE SITE SEE SHEET AS1.6

4. STRIP ALL PLANTER SOIL AND TEST FOR ACCEPTABLE LEVELS OF SODIUM CHLORIDE

5. CONTRACTOR TO PROTECT ALL ADJOINING AND ADJACENT PROPERTY DURING ALL PHASES OF THE CONTRACT

6. CONTRACTOR TO PRUNE TRIM AND ROOT FERTILIZE ALL EXISTING GINKO TREES AND PROTECT TRUNK AND ROOTS DURRING ALL PHASES OF CONSTRUCTION. TRUNK TO BE PROTECTED BY 2 X 4 SLATS WIRED AND WRAPPED AROUND TRUNK EXTENDING TO THE UNDERSIDE OF THE TREE LIMBS

GENERAL NOTES:

1. THIS IS AN INSTRUMENT OF SERVICE ONLY AND IS THE PROPERTY OF MERZ & ASSOCIATES L.L.C.

2. WALL DIMENSIONS ARE TAKEN FROM FINISHED FACE OF SURFACES

3. WRITTEN DIMENSIONS ON THESE DRAWINGS SHALL HAVE PRECEDENCE OVER SCALED DIMENSIONS

4. CONTRACTORS SHALL VERIFY AND BE RESPONSIBLE FOR ALL DIMENSIONS AND CONDITIONS SHOWN BY THESE DRAWINGS.

5. ATTENTION IS DIRECTED TO THE CONTRACTOR'S RESPONSIBILITIES IN REGARD TO SUBMISSION OF SHOP DRAWINGS.

6. CONTRACTORS SHALL PROMPTLY NOTIFY MERZ & ASSOCIATES L.L.C. IN WRITING OF THE EXISTENCE OF ANY VARIATIONS BETWEEN THE CONTRACT DOCUMENTS AND ANY APPLICABLE CODES OR ORDINANCES OF REGULATORY AGENCIES.

7. ALL EXISTING CONDITIONS ARE TO BE SITE VERIFIED BY THE CONTRACTOR SHALL NOTIFY IN WRITING THE EXISTENCE OF VARIATIONS TO MERZ & ASSOCIATES L.L.C.

8. CONTRACTOR TO VERIFY LOCATIONS OF UNDERGROUND UTILITIES BEFORE COMMENCING CONSTRUCTION. ANY CONFLICTS ARE TO BE BROUGHT TO THE ARCHITECT IN WRITING.

MERZ & ASSOCIATES
ARCHITECTS & URBAN DESIGNERS
440 E. Lafayette, Loft 211
Detroit, MI 48226
P 313.963.2800
F 313.963.3019
merzassoc@mediatech.net

CAPITOL PARK IMPROVEMENT PROJECT

Issued For:	
BULLETIN/△	08.28.09
BID	08.05.09
BID	07.07.09
CITY REVIEW	06.22.09
REVIEW 90%	05.18.09
REVIEW	04.23.09
REVIEW	07.30.08
Description:	Capitol Park Resurfacing & Improvements
Job No.	0705
Drawn:	JJ.RF.TM.CG
Checked:	CM BM
Approved:	CM
Date:	11/27/07
Scale:	See Drawing

ASD 1.1