# DEPARTMENT OF PUBLIC WORKS DETROIT

CITY ENGINEER'S OFFICE --- DIVISION OF PAVING DESIGN

## STREET PAVING PLAN

A.P. 3-13 E

NAME OF STREET: ORANGELAWN

FROM E. P.L. WINTHROP AVE.

TO W. P.L. SUSSEX AVE.

TYPE OF PAVEMENT _____ WIDTH 30'/36'

NUMBER OF SHEETS: 1

SHEET NO. 1

CARD NO.

| INDEX NO. | TOPO. NO. |
|---|---|
| 69 | 100 |
| 70 | 82 |

RECORD NO.

| | |
|---|---|
| SEWER | [illegible] |
| INDEXED | |
| REVISIONS: | |

| JOB NO. | | PROGRESS | |
|---|---|---|---|
| BLUE PRINT ISSUED FOR: | DATE | START | FINISH |
| GRADE ONLY | | | |
| CATCH BASINS | | | |
| PAVING-CLASS- | | | |
| DEPT. OF WATER SUPPLY | | | |
| GAS CO. | | | |

| QUANTITIES | LOTS | CITY | LOTS | CITY |
|---|---|---|---|---|
| EXCAVATION | 1083 | 330 | | |
| STRAIGHT CURB NEW | 1655 | 176 | | |
| OLD CURB RESET | | | | |
| CIRCULAR CURB | — | 195 | | |
| PAVING | 2997 | 877 | | |
| SEWERS 12" (LIN. FT.) | 385 | 115 | | |
| WKS. SQ. FT. | — | 576 | | |
| M.H's ADJUST. | — | 2 | | |
| M.H's CONSTR. | — | 3 | | |
| C.B's-CONSTR. | 6 | 6 | | |

| | | | | | |
|---|---|---|---|---|---|
| HOR. SCALE 1" = 100' 1" = 50' | | BOOK 1539 PAGE 31 | | | |
| VER. SCALE 1" = 2' | | DATE 1-24-44. | | | |
| PLAN | M.F.F. | PROFILE | M.F.F. | COMPUTED | R.E.R. |
| CHECKED | | GRADE | M.F.F. R3 | CHECKED | R3 |
| LOTS 2L | 1 719 10 | LENGTH | 859 55 | | |
| CITY 2L | 260 | LENGTH | 130 | | |
| TOTAL 2L | 1 979 10 | LENGTH | 989 55 | | |
| | | LOTS | CITY | | |
| COST ADVERTISING BLANKS | | | | | |
| COST INSPECTION | | | | | |

| | |
|---|---|
| DESIGNED BY | R3 |
| DRAWN BY | M. T. Franczak |
| TRACED BY | |
| CHECKED BY | R3 |
| APPROVED | J. L. Barton |
| | W. J. Wallace |
| | ENGINEER OF STREETS |
| | Martin R. Fisher |
| | ASS'T CITY ENGINEER |

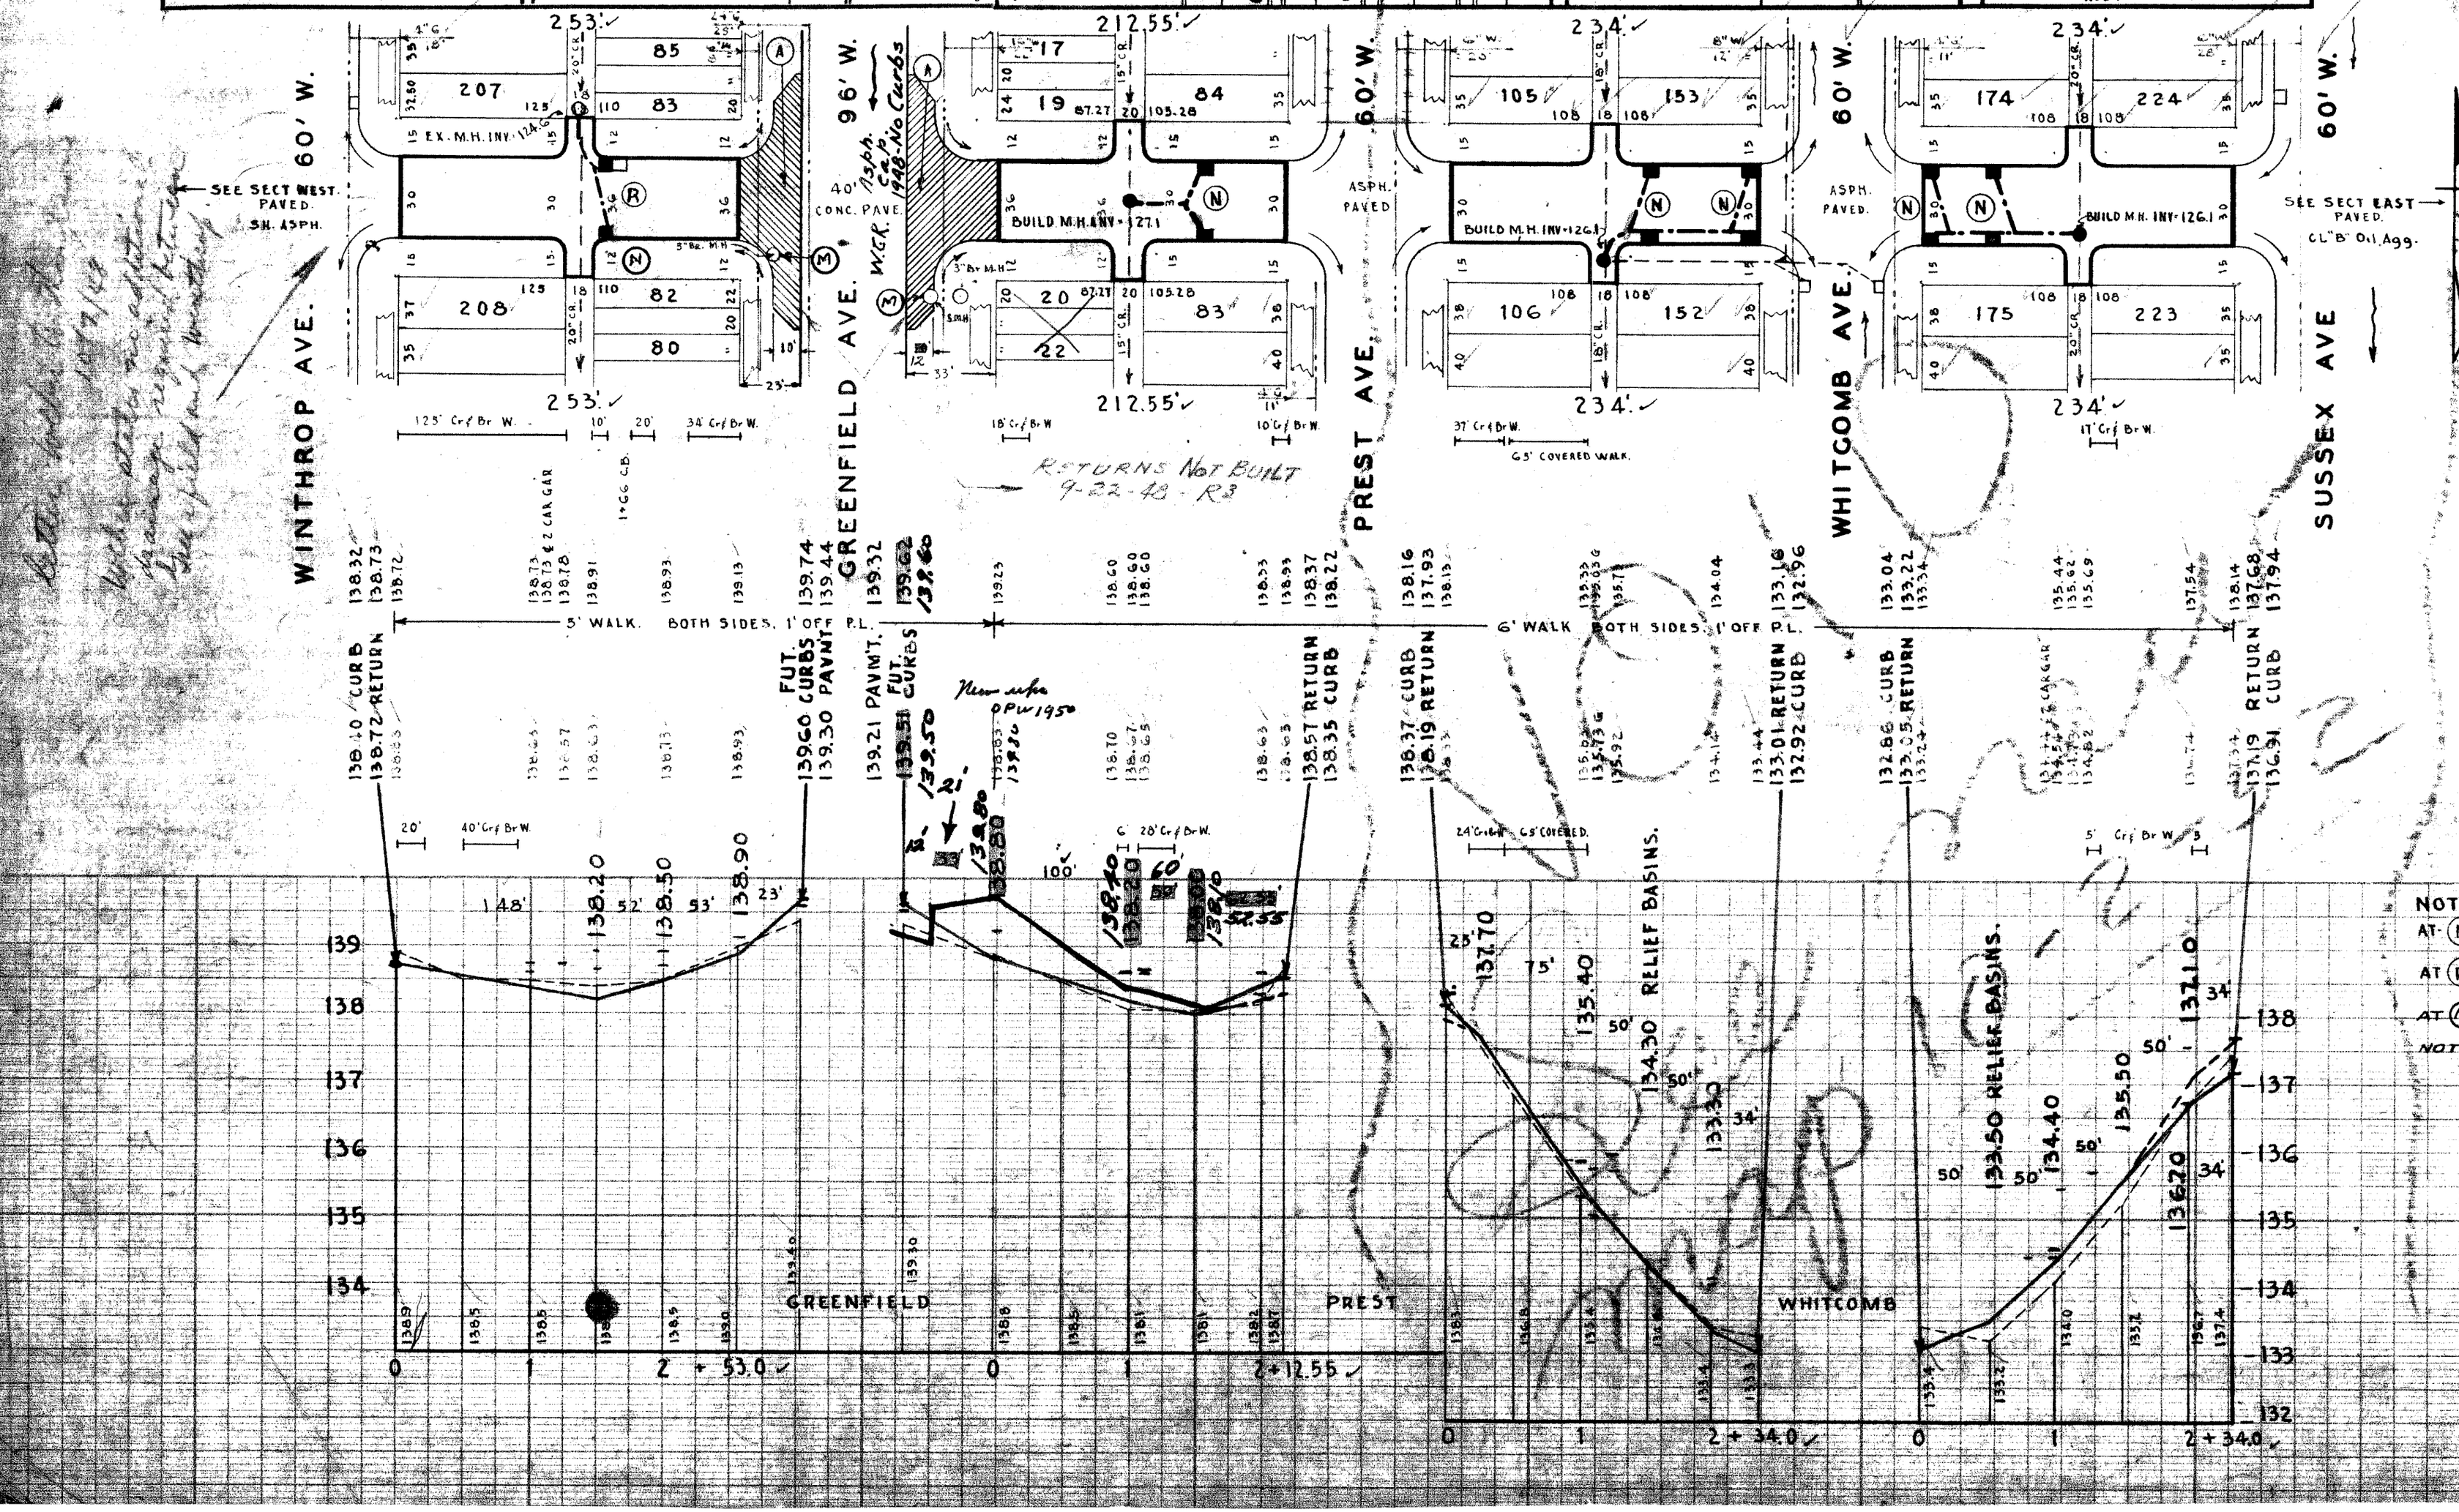


| BENCH MARKS | ELEV. |
|---|---|
| ARROW ON HYD. N.E. COR. ORANGELAWN AND WINTHROP AVENUES. | 141.94 |
| ARROW ON HYD. N.E. COR. ORANGELAWN AND PREST AVENUES. | 141.24 |

AT (A) CONSTRUCT CONCRETE RETURNS & 10' WIDENINGS SEE D.W.G. # C-371.
CONCRETE SLAB IN GREENFIELD AVE TO BE 10" THICK.

1937

NOTE:-
AT (N) CONSTRUCT 11 ST'D. 18"x12" Y BASINS COMPLETE, AND 3 ST'D M.H's. COMPLETE + CONNECT TO EXISTING OUTLETS AS SHOWN
AT (R) ABANDON 1 EXIST. 12" L BASIN AND REPLACE WITH 1-18"X12" Y BASIN COMPLETE AND CONNECT TO EXIST. OUTLET AS SHOWN.
AT (M) ADJUST TOPS OF 2 EXISTING MANHOLES
NOTIFY D.P.W. TO SALVAGE OLD CASTINGS