63-2

CONTRACT NO. P.W. 402AW

STREET PAVING PLAN
CITY OF DETROIT

DEPARTMENT OF PUBLIC WORKS — CITY ENGINEERS OFFICE

NAME OF STREET WESTBROOK

FROM 11' S. OF N.P.L. McNICHOLS

TO N.P.L. OF ORCHARD

SHEET 1 OF 1 SHEETS

TYPE OF PAVEMENT 8 6 8 ONE COURSE CONCRETE-INTEGRAL CURB 26' 30' FT. WD.
8" UNIFORM AT STREET INTERSECTION EXCEPT AS NOTED

PET. NO. 7237 HERMAN BORITZKI 5-17-60

DATE	REVISIONS
	OLD PLAN - OCT., 1935

SUPPLEMENTARY DETAILS			
C-326	C-524	C-733	C-738
C-326A	C-685	C-737	C-1608
C-327	C-686	C-739A	C-1783
C-360	C-587	C-739B	

C-4378 THRU C-4393A

BEFORE STARTING CONSTRUCTION
CONTRACTOR MUST CHECK WITH UTILITIES FOR LOCATIONS OF EXISTING STRUCTURES WHETHER OR NOT INDICATED ON PLANS.

SCALE	
LOTS & ALLEYS	1" = 100'
STREET WIDTH	1" = 50'
VERTICAL	1" = 4'
DRAINAGE COMPLETED	UNKNOWN
PAVING COMPLETED	C.C. 12-17-63

COLD PATCHING 5YD
STONE AND GRADE 3YD

CITY
20
58

BERM GRADING 5YD. 893
CURB REMOVAL 10 LFT
REPAIRS 6" STD 100 SFT.

QUANTITIES		ESTIMATED LOTS	ESTIMATED CITY
EXCAVATION	CU. YDS.	1249	53
NEW CURB TYPE II	LIN. FT.	8	29
PAVING 8:6:8	SQ. YDS.	3434	
8" UNIFORM	"	13	47
TEST CORES PATCHING	EACH	5	100
SIDEWALK	SQ. FT.		272
MANHOLES CONE	ADJUST		6-5 1-0
	CONSTRUCT		1
BASINS	ADJUST		6
	ABANDON		
	CONSTRUCT		5
SEWER—12"	LIN. FT.		170
5" UNIFORM CONC. WITH CURB	SY.D		114
SIDEWALK REMOVAL	SFT.		272
DRIVEWAY REMOVAL	SFT.		100

PETITION NO.	7237	PETITION DATE	5-17-60
ASSIGNMENT NO.	325-CY-16	GROUP NO.	
BOOK NO.	1902 PG. 28 31	LEVEL DATE	11-7-60
LOTS 2L	2250.00	LENGTH	1125.00
CITY 2L	72.00	LENGTH	36.00
TOTAL	2322.00	LENGTH	1161.00

DATE OF DRAW'G. OCT. 25, 1960

	MADE BY	CHECKED BY
PLAN	D. HAUER	
PROFILE	D. HAUER	
GRADE	W. OWENS	
ESTIMATE	[illegible]	[illegible]
SEWER APPROVED	[illegible]	[illegible]
FINAL CHECK	[illegible]	FLUNDER

APPROVED
ENGINEER OF STREETS
ASS'T. CITY ENGINEER
CITY ENGINEER

INDEX NO.	TOPO NO.	INDEXED
74	114	✓

BENCH MARKS	ELEV.	
P.L.B.M. #114-253 A - N.E. COR. PATTON & McNICHOLS	152.742	REC.
P.L.B.M. #114-253 - N.W. COR. PIERSON & McNICHOLS	150.096	REC.
C.B.M. - 1 HYD. - N.W. COR. WESTBROOK & McNICHOLS	155.06	
C.B.M. - 1 HYD. - W.S. WESTBROOK - STA. 4+01	156.46	
C.B.M. - 1 HYD. - W.S. WESTBROOK - STA. 7+61	164.03	
C.B.M. - 1 HYD - S.W. COR. WESTBROOK & ORCHARD	164.12	

NOTE -
FOR SYMBOLS (A) ETC. SEE STD. DET. DWG C-4378
AT (B) REMOVE 5' LFT OF CURB FOR A TOTAL OF 10 LFT

HORIZONTAL CONTROL -
USE CROSSES CUT IN WALK 5' W. OF E.P.L. WESTBROOK AT STA. 0+00, 5+00, AND 11+50.

NOTE
MICHIGAN BELL TELEPHONE CO. DUCTS ARE SHOWN AS ACCURATELY AS POSSIBLE FROM AVAILABLE RECORDS.
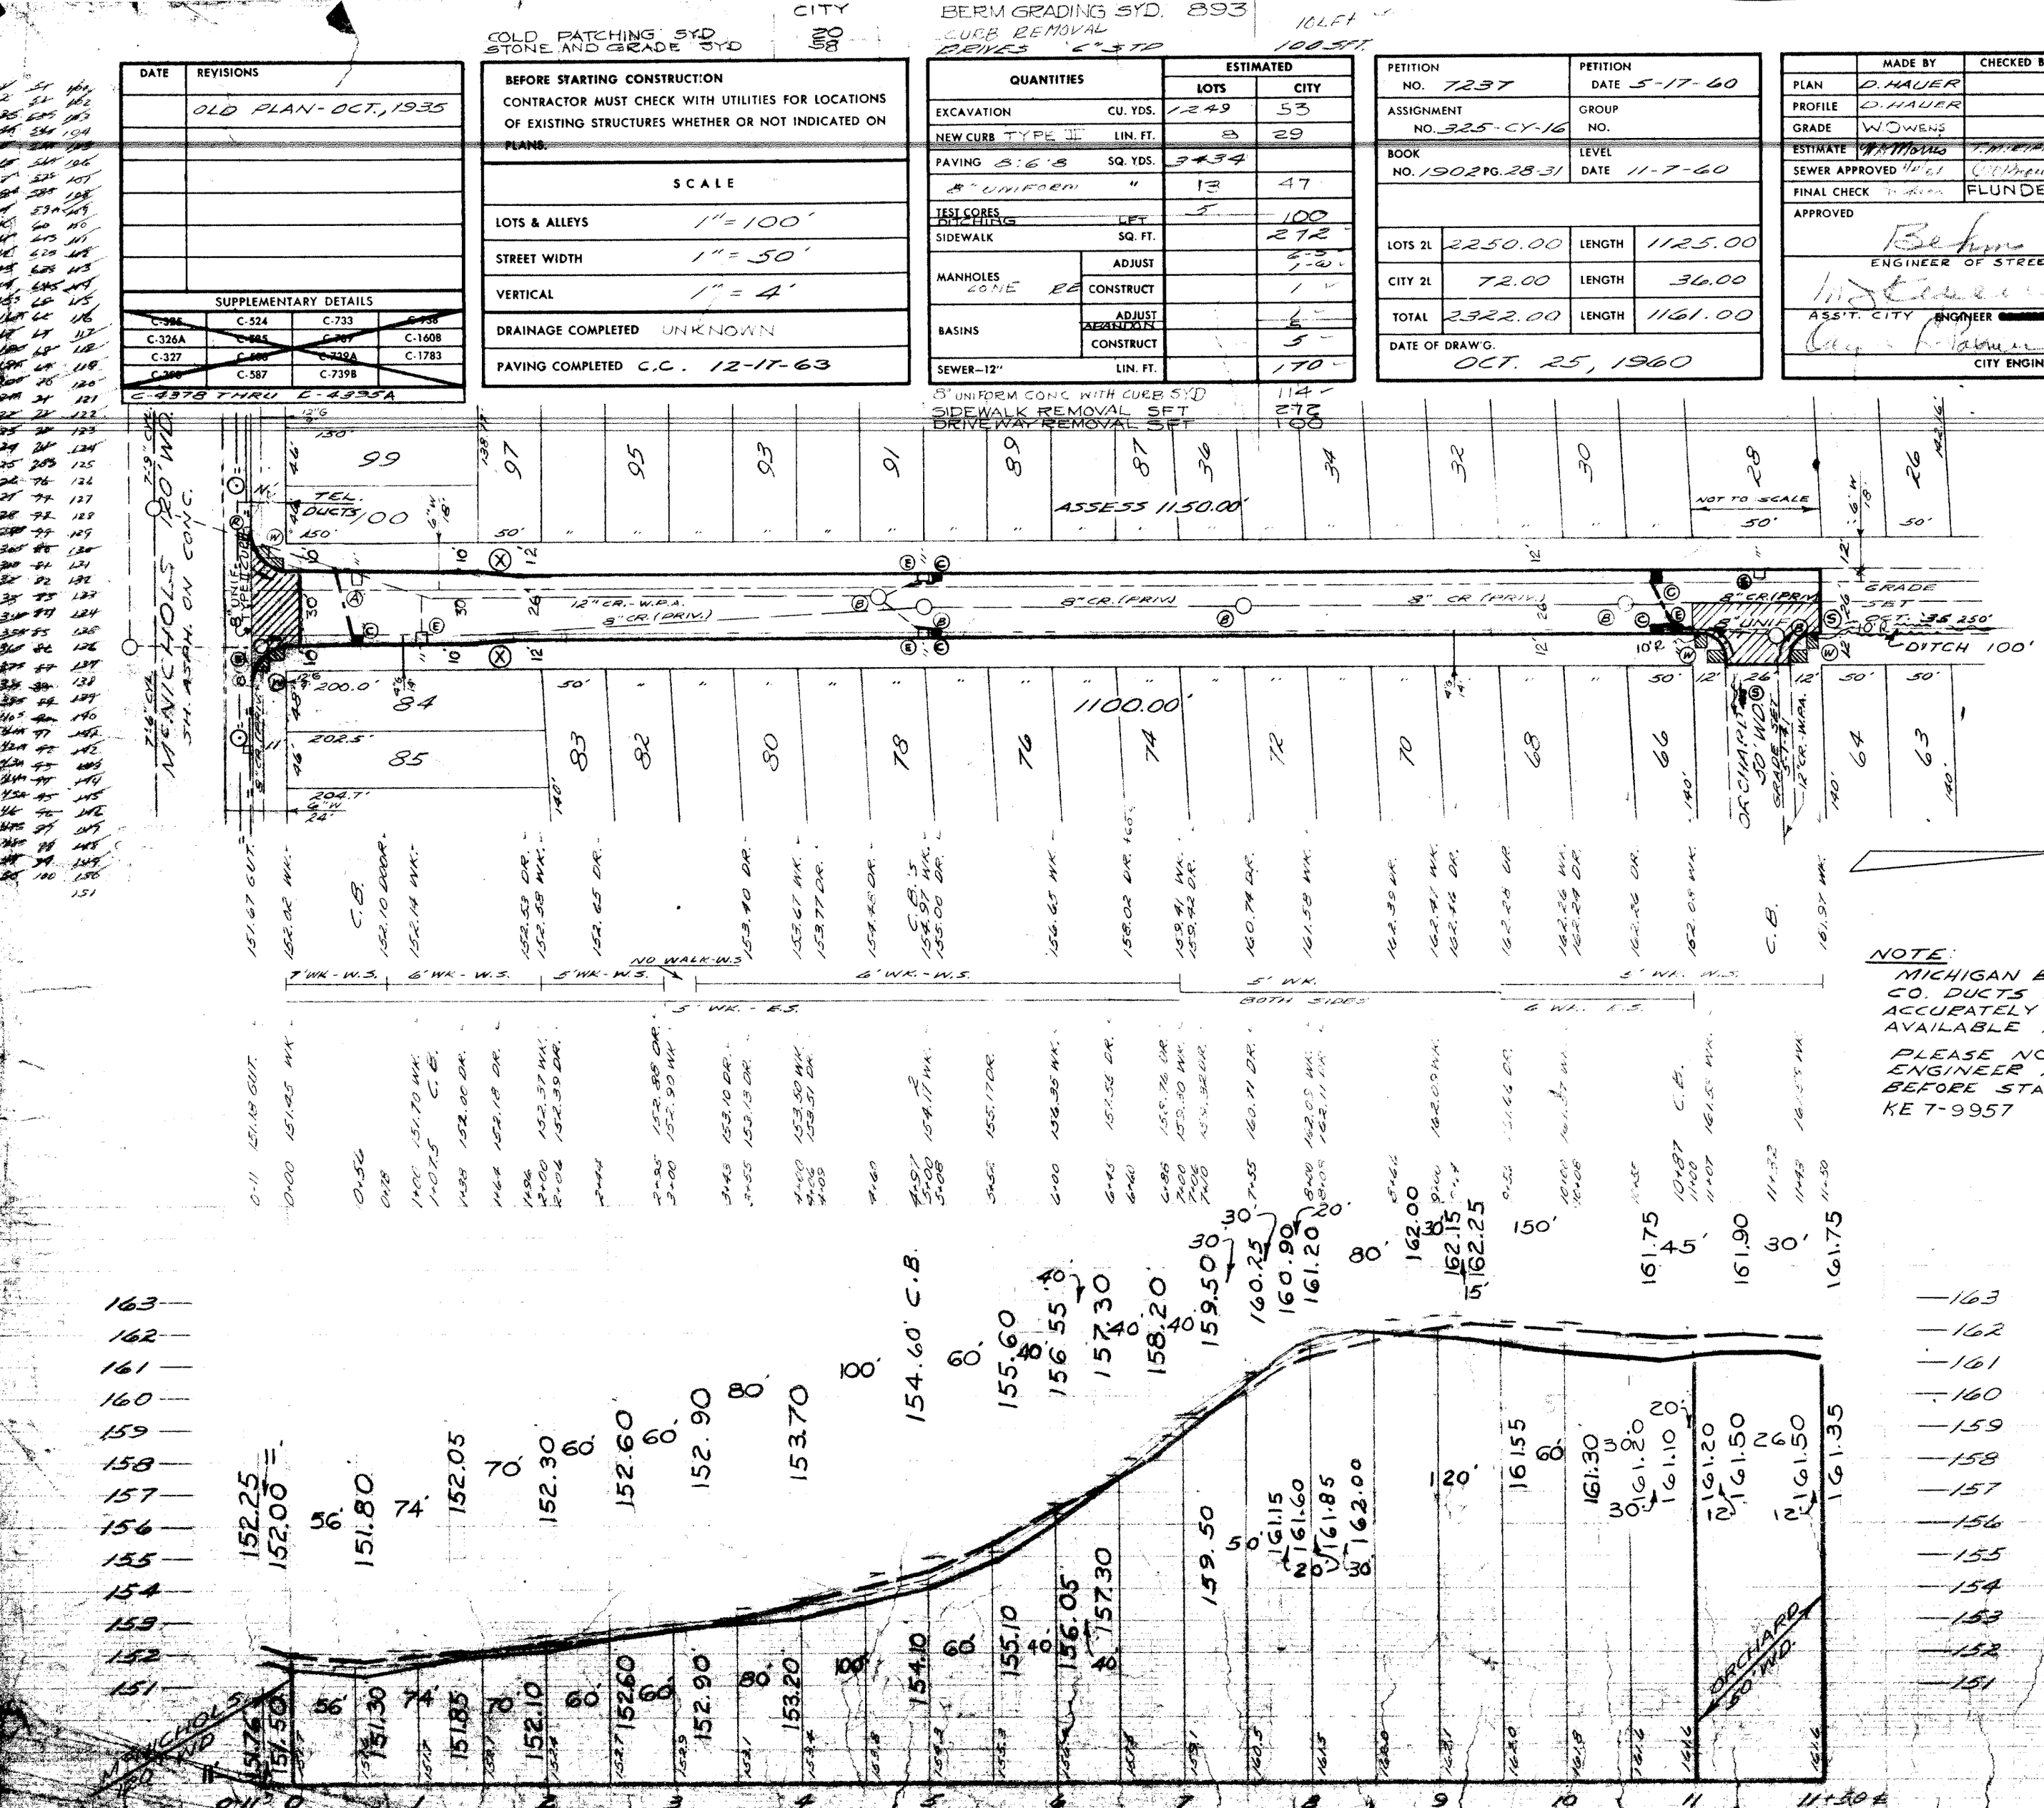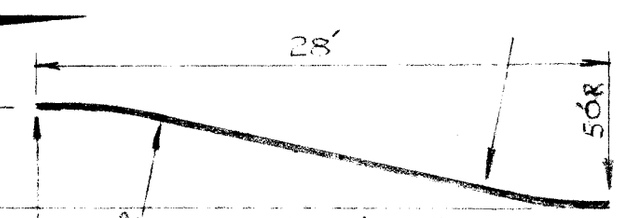
PLEASE NOTIFY PLANT ENGINEER A. SCHMELZER BEFORE STARTING WORK
KE 7-9957